

1606XLS240UPS


Allen-Bradley 1606 Ups Charging Module 22.5 to 30V DC to 22.5V DC 240W 10A



Allen-Bradley

by ROCKWELL AUTOMATION

POWER SUPPLIES

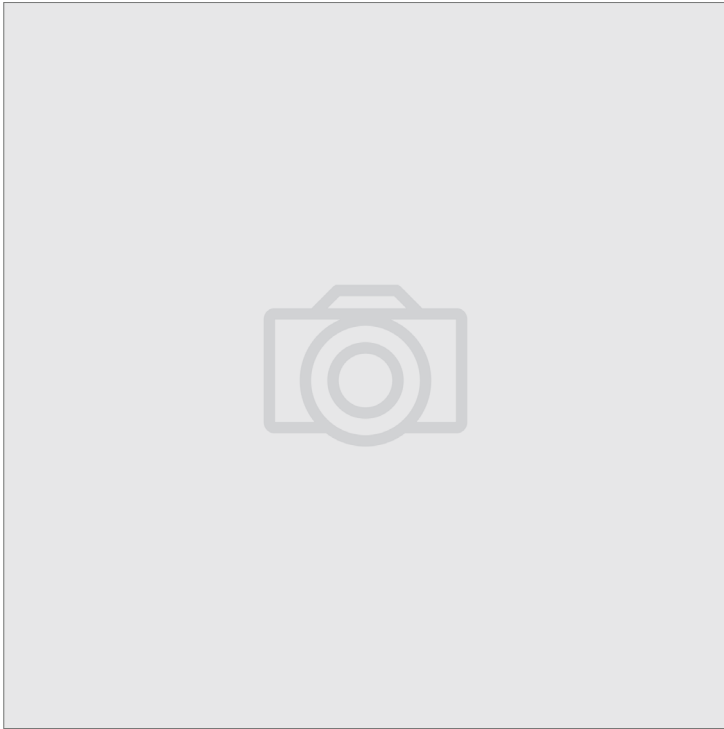

Component type	DC-power supply
Range	1606
Model	N/A
Product status	Existing

The Allen-Bradley 1606 Switched Mode Power Supplies are the ideal solution for reliable and efficient power supply. Features compact design with wide input voltage range (single and multi phase AC and DC), power boosts, in-built redundancy and conformal coating for harsh environments. Available with multiple output voltage levels and wide power output range to accommodate various load sizes.

ELECTRICAL

Voltage type of supply voltage	DC
Frequency	50 - 60 Hz
Nominal current (In)	10.0 A
1st secondary output voltage	22.5 - 22.5 V
Max. output current 1	10.0 A
Nominal value output current 1	10.0 A
Nominal value output voltage 1	24.0 V
Power output	240.0 W
Type of electric connection	Spring clamp connection
With LED indication	Yes

CONSTRUCTION

Rail mounting possible	Yes
Degree of protection (IP)	IP20

DIMENSIONS

Width	49.0 mm
Height	124.0 mm
Depth	117.0 mm
Weight	0.53 kg

ENVIRONMENT

Operating temperature	-25 - 70 °C
------------------------------	-------------