


NYLON MOUNTING HEAD, PUSH MOUNT & ID TIES

FEATURES

- Head and pawl are integrally moulded for added strength and durability. Tip designed for easier pick up, insertion and pull through
- Smooth round edges do not cut insulation
- Self-locking low profile head conserves space
- Not suitable for outdoor use

NYLON MOUNTING HEAD CABLE TIE NATURAL



ORDERING INFORMATION

PART NO.	LOOP TENSILE STRENGTH (KG)	BUNDLE DIAMETER (MM)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	COLOUR	UNIT	QTY
CT140MH/NT	18	32	150	3.6	1.2	NATURAL	PAK	100
CT200MH/NT	22	50	200	4.8	1.3	NATURAL	PAK	100
CT365MH/NT	54	98	375	7.6	2.1	NATURAL	PAK	100


NYLON PUSH MOUNT CABLE TIE NATURAL



ORDERING INFORMATION

PART NO.	LOOP TENSILE STRENGTH (KG)	BUNDLE DIAMETER (MM)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	COLOUR	UNIT	QTY
CT200PM/NT	22	50	203	4.8	1.4	NATURAL	PAK	100

NYLON ID TIES

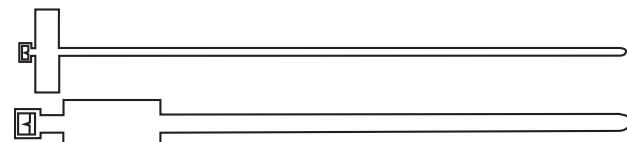

ORDERING INFORMATION

PART NO.	LOOP TENSILE STRENGTH (KG)	BUNDLE DIAMETER (MM)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	COLOUR	UNIT	QTY
CT98ID/100	8	25	100	2.5	1.1	NATURAL	PAK	100
CT200ID/NT	22	50	200	4.8	1.3	NATURAL	PAK	100

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.