



CLEVERTRONICS 240V LED CIRCLITE & MICROWAVE SENSOR




PRODUCT INFORMATION

Catalogue Number	FCLLED-MS
Description	240V LED Circlite and Microwave sensor
Construction	Polycarbonate base and Opal Acrylic diffuser
Mounting	Surface mount
Dimensions L x W x H	340mm (Diameter) x 100mm (Height)
Diffuser	Opal Acrylic
Lamp(s)	LED panel array (30,000 hours), 4000K, Ra>80
Total lumen output	1340 lm
Operating Voltage	250V AC; 50Hz (double insulated)
Power Consumption	14.9 Watts (Max), 1.6W (Standby)
IP Rating	IP44
Operating Temperature	1°C to 40°C

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

DESCRIPTION OF MICROWAVE SENSOR

- Detection angle: 30-150°
- Detection range: 12-18M(diameter), adjustable
- Time setting: 10sec-30min, adjustable
- Light-control: 5-100LUX, adjustable
- Mounting height: Max. 12M

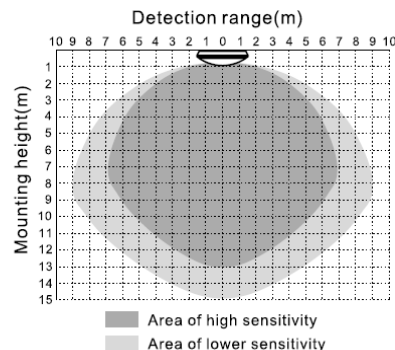

240V