


AURORA Tritone

AURORA9W110-N-TRI

SAP CODE: 2001078

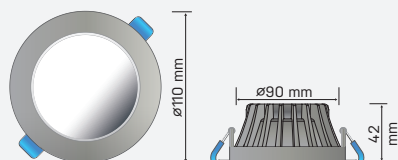


9W switchable colour temperature, recessed diffuser, fixed LED downlight

A brushed nickel trimmed downlight with recessed opal lens. It is dimmable and there is a selection of three colour temperatures on each luminaire.



Photometric Diagram

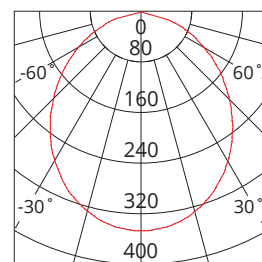

Unit: cd
 - C0/180 100.0deg
 - C90/270 100.0deg

KEY INFORMATION

Lumen Output 9W	760 / 860 / 760lm
Input Power	9W
Hole Cutout Size	Ø90mm
Dimming Options	*Phase-Cut Dimming
Trim Colour	BRUSHED NICKEL
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy 9W	85 / 96 / 85lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	100

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	30VDC
Power Factor	>0.9
LED Input Current (nominal)	300mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	0.2kg
Dimensions	Ø110x42mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.