


AURORA Tritone

AURORA12W110-W-TRI

SAP CODE: 2000849

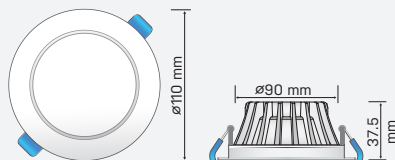


12W, white trim, Tritone, recessed diffuser, fixed LED downlight

A dimmable low glare LED downlight with a recessed opal diffuser and choice of 3 colour temperatures.

Accessories
ADAPTOR RING



Photometric Diagram

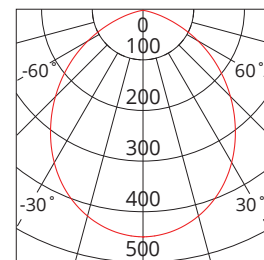

Unit: cd
- C0/180 100.0deg
- C90/270 100.0deg

KEY INFORMATION

Lumen Output	1020 / 1170 / 1050lm
Input Power	12W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	COMING SOON

PHOTOMETRIC

Efficacy	85 / 98 / 88lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	100°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40VDC
Power Factor	>0.9
LED Input Current (nominal)	300mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	0.2kg
Dimensions	Ø110x42mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.