



PURO 350

CL21W350R4K120DF

SAP CODE: 2000107

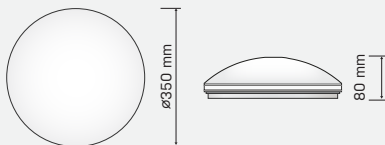

Photometric Diagram



Unit: cd
 - C0/180 115.0deg
 - C90/270 115.0deg

4000K, 21W, weather resistant, LED oyster

An LED oyster light for protected exterior walls and under eaves.

KEY INFORMATION

Lumen Output	1380lm
Input Power	21W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	66lm/W
LED	SMD
CCT	4000K
CRI	>85
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	42VDC
Power Factor	>0.9
LED Input Current (nominal)	500mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	PMMA (acrylic)
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	1.22kg
Dimensions	Ø350x80mm
Operating Ambient Temp.	-25 to 50°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.