



## QUICK FACTS

Input power	<b>25W</b>
Power Factor	<b>≥ 0.9</b>
IP Rating	<b>54</b>
Dimming	<b>N/A</b>
Lumen output	<b>1680lm/ 1840lm / 1800lm</b>
CCT	<b>3000K/ 4200K/ 5700K</b>
CRI	<b>80</b>
Beam Angle	<b>120°</b>
Fascia Colour	<b>White</b>
Installation	<b>Surface Mounted</b>
Warranty	<b>5 years</b>

PHOTO

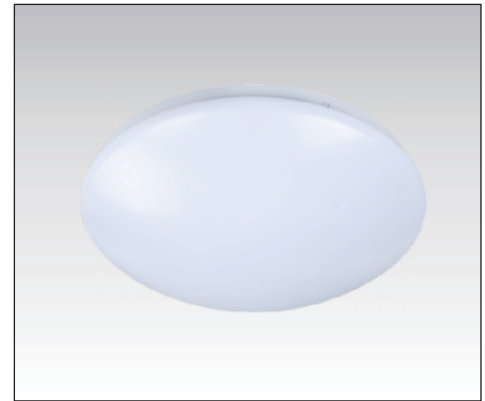


PHOTOMETRIC DIAGRAM




UNIT: cd

- C0/180 118.1deg
- C90/270 122.1deg



UNIT: cd


- C0/180 118.3deg
- C90/270 122.3deg



UNIT: cd

- C0/180 118.4deg
- C90/270 121.8deg

DIMENSIONS

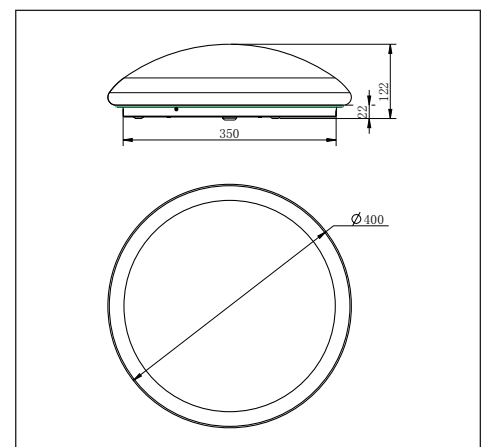

## PRODUCT SPECIFICATIONS

Supply Voltage	<b>220-240V</b>
Supply Frequency	<b>50-60Hz</b>
Cable	<b>NO</b>
Base	<b>SPCC (Steel)</b>
Diffuser	<b>PMMA</b>
Driver	<b>Integral</b>
Weight	<b>G.W : 1.15kgs</b> <b>N.W : 0.85kgs</b>
Ambient Temp	<b>-30°C - 40°C</b>
Avg. lifetime	<b>≥50,000 hrs@ ta 25°C</b>

Option:  
Emergency Pack, Emergency w/  
Intellisensor, Intellisensor

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.