



DULAR

DULAR-FIX-BLK

SAP CODE: 2001892

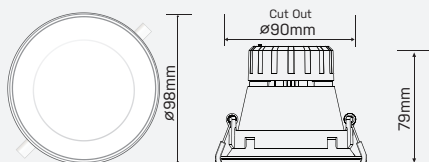

Photometric Diagram

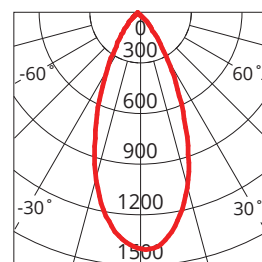

Unit: cd
 - C0/180 45.0deg
 - C90/270 45.0deg

9W, dimmable,
switchable colour
temperature, trimless

Black trimless LED downlight
with recessed lens to
minimalise glare



KEY INFORMATION

Lumen Output	930 / 950 / 900lm
Input Power	9W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Fitting Colour	BLACK
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
UGR Rating	<19
Rebate Scheme Approvals	VEU; REPS; IPART LCP 8.77

PHOTOMETRIC

Efficacy	103 / 106 / 100lm/W
LED	SMD
CCT	3000 / 4000 / 5700K
CRI	>80
Beam Angle	45°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	75V DC
Power Factor	>0.9
LED Input Current (nominal)	120mA
Useful life @Ta25° (L70)	36,000hr

CONSTRUCTION

Housing	Aluminium + Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Metal Clip
Connection Type	1m Flex & Plug
Total Weight	0.25kg
Dimensions	Ø98 x 79mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.