



DURALITE

DURALITE20W06

SAP CODE: 2001496

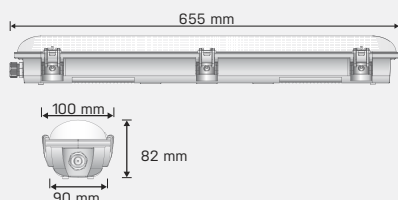

Photometric Diagram



Unit: cd
 - C0/180 120.0deg
 - C90/270 120.0deg

20W outdoor LED batten

Switchable 4000K or 5000K, weatherproof LED batten.

Accessories

SUSPENSION KIT

KEY INFORMATION

Lumen Output	2090 / 2070lm
Input Power	20W
Hole Cutout Size	N/A
Install	SUSPENDED, SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	Grey
Warranty	4yr
IP Rating	IP66
IK Rating	IK09
IC Rating	N/A
Rebate Scheme Approvals	COMING SOON

PHOTOMETRIC

Efficacy	104 / 103lm/W
LED	SMD
CCT	4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	90VDC
Power Factor	>0.9
LED Input Current (nominal)	200mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Bracket
Connection Type	Terminal Block
Total Weight	1.05kg
Dimensions	655 x 100 x 82mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 1