



TRIPROOF

TRIPROOF12-SS

SAP CODE: 2002112

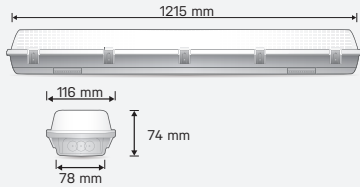

Photometric Diagram



Unit: cd
 - C0/180 110.0deg
 - C90/270 110.0deg

1200mm, 36/18W, Intellisensor, Tritone, indoor/outdoor LED batten

A robust outdoor/indoor IK08 vandal resistant LED batten with Intellisensor for automatic standby dimming and Tritone switchable colour temperature.

Accessories
SUSPENSION KIT



Remote Controller required for sensor reconfiguration.
BATTEN-REMOTE
(sold separately)

KEY INFORMATION

Lumen Output	4100 / 4300 / 4100lm	2200 / 2300 / 2200lm
Input Power	36W	18W
Hole Cutout Size	N/A	
Install	SURFACE MOUNT	
Dimming Options	Non-Dimmable	
Trim Colour	WHITE	
Warranty	5yr	
IP Rating	IP65	
IK Rating	IK08	
IC Rating	N/A	
Rebate Scheme Approvals	-	

PHOTOMETRIC

Efficacy	115 / 120 / 110lm/W	120 / 130 / 120lm/W
LED	SMD	
CCT	4000 / 5000 / 6500K	
CRI	>80	
Beam Angle	120°	

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	42V
Power Factor	>0.9
LED Input Current (nominal)	450/900mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Clips, Cable gland, Suspension bracket
Connection Type	P14 Terminal Block
Total Weight	2.4kg
Dimensions	1215 x 116 x 74mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1
Food Grade Approval	HACCP