


# ELECTRA CABLES

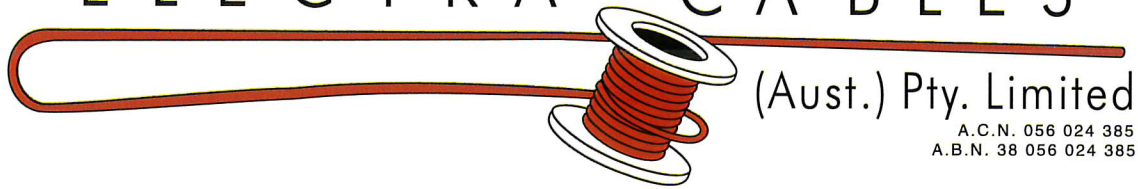


(Aust.) Pty. Limited

A.C.N. 056 024 385  
A.B.N. 38 056 024 385

## Low Smoke Zero Halogen - Flat TPS Cables LSZH 450/750V 2& 3 core + Earth flat.

**Application:** For light to medium industrial use. Festoon systems and other applications. or all building internal wiring applications.



**Conductor:** Plain annealed copper (AS/NZS 1125)

**Insulation:** X-HF-90 90°C LSZH

**Sheath:** X-HF-90 90°C LSZH

**Sheath Colour:** Light blue

Pastel orange



**Standard:** AS/NZS 5000.2

**Packing Length:** 100m, 500m

**Normal Operating Temperature:** 90°C

**Typical Features:**

Electra Cables Part No.	Stranding No./mm	Conductor area mm	Insulation Thickness mm	Sheath Thickness mm	Nom. O/D mm	Approx. Mass kg/100m
2 Core Twin or Twin Active (No Earth)						
SRF2015VLS	7/0.50	1.5	0.6	0.9	7.2×4.6	6.2
SRF2025VLS	7/0.67	2.5	0.7	1.0	8.9×5.5	9.7
SRF2040VLS	7/0.85	4.0	0.8	1.1	10.6×6.5	14.3
SRF2060VLS	7/1.04	6.0	0.8	1.1	11.7×7.1	18.5
2 Core + Earth						
SRF3015VLS	7/0.50	1.5	0.6	0.9	10.0×4.6	8.85
SRF3025VLS	7/0.67	2.5	0.7	1.0	12.4×5.5	13.7
SRF3040VLS	7/0.85	4.0	0.8	1.1	14.0×6.5	18.7
SRF3060VLS	7/1.04	6.0	0.8	1.1	15.2×7.1	23
3 Core + Earth						
SRF4015VLS	7/0.50	1.5	0.6	0.9	12.6×4.6	11.5
SRF4025VLS	7/0.67	2.5	0.7	1.0	15.8×5.5	18.3



Quality ISO 9001  
Certified System

**Note:** Other types or other lengths of the above cables can be manufactured according to customers specifications.