

ORDERING INFORMATION

CODE	DESCRIPTION	PRODUCT NUMBER	CARTON QTY.	WEIGHT (NET / GROSS)
11258	Mercury Basic Emergency Exit	9336462112588	4	1.1 Kg / 5.35 Kg

OPERATIONAL INFORMATION

GENERAL				BATTERY	
Voltage (V)	230V	Emergency Classification	C0:E2 C90:E1.6 (2Hr)	Battery Type	LiFePO4
Frequency (Hz)	50 Hz	Mounting Type	Rod / surface / suspended or wall mounted	Battery Voltage	3.2 V
Ambient Temp.	0 - 40°C	Wiring	Terminal block (1-16mm □)	Battery Codes	01307
Class	2	Viewing Distance	24M	Charger Type	Variable
Duration	90 / 120 min	Lamp Power	1 W	Charging Time	16 Hours
IP Rating	IP20 (IP65 case)				


TOTAL POWER CONSUMPTION (TPC)

MAINTAINED MODE		NON-MAINTAINED MODE	
Max.	Avg.	Max.	Avg.
3.5 W	2.2 W	1.4 W	0.32 W


CONSTRUCTION AND DIMENSIONS

BODY	PC
DIFFUSER	PC

MERCURY III BASIC

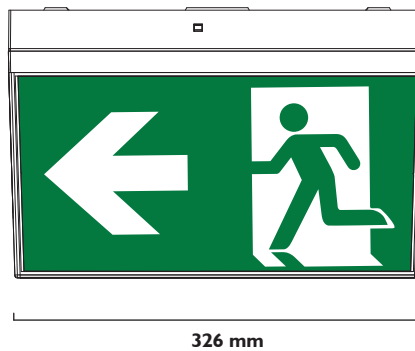

326 mm

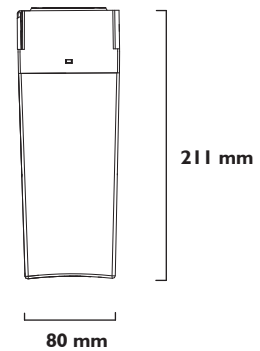

211 mm

80 mm

NOTE: For more information on the chemical resistance of our polycarbonate, please see the technical downloads page at ektor.com.au

ACCESSORIES AND SPARE PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
01995	Mercury III Decal pack	01307	Battery 1500mAH 1 Cell LiFePO4
03922	Weatherproof Case for Mercury III	01990	Rod Mount Kit
01915	Cantilever Bracket		

Datasheet is subject to change without notice

Last updated: 19. September 2016_V1.2