

# CEILING FANS



Optimised with

# **AeroGlide**

## **SYSTEM**

**Maximises air flow and fan efficiency**

**Ensures smooth, low noise operation**

**Produces balanced, aerodynamic rotational movement**

AeroGlide System is the next generation of innovative ceiling fan technology. It combines aerodynamic engineering techniques with state-of-the-art motor design to maximise fan efficiency and achieve a balanced, ultra smooth rotational movement.

Impeller blade geometry has been fully optimised to enhance air flow volume and direct the air stream where it is needed.

AeroGlide also incorporates ergonomic quick connect terminals that simplify wiring and allow fast, time saving installation.

The AeroGlide System is integrated into the Fantech Trade premium ceiling fan range, including the Flair, Quinton and Juliet models.

Our years of fan engineering knowledge and expertise in air movement ensures AeroGlide's inherent attributes deliver strong efficient air flows and quiet operation.



# QUINTON

## 4 BLADE CEILING FAN

# AeroGlide SYSTEM

**6\***  
YEAR  
WARRANTY

**ULTRA  
QUIET**

**BUILT  
TOUGH**  
FROM ABS

**QUICK  
INSTALL**

**STRONG  
AIR FLOW**

The Quinton 4 blade ceiling fans, with and without dimmable LED light, provide exceptional air circulation and cooling effect within indoor and covered outdoor areas. They are made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.

- Innovative blade geometry maximises air flow & fan efficiency.
- 18 watt dimmable LED light can be set to cool, neutral or warm white (LED light models only).
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Available in black or white.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).




3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)

\*Conditions apply.

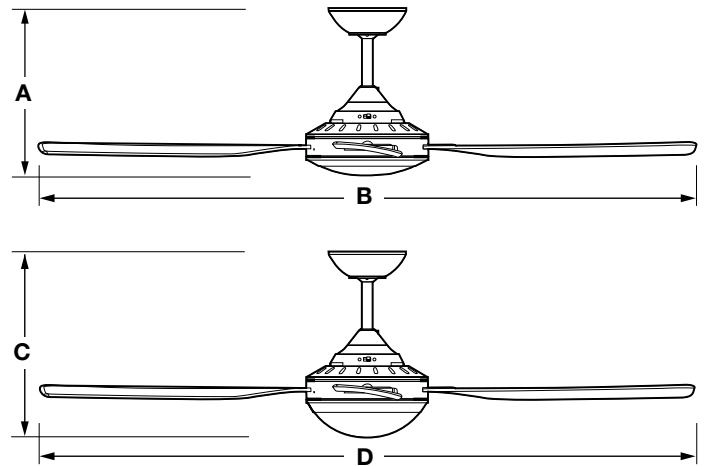



MODEL	QTN48WH QTN48BK	QTN52WH QTN52BK	QTN48WH-LED QTN48BK-LED	QTN52WH-LED QTN52BK-LED
A	340mm/13.4"	340mm/13.4"	-	-
B	1220mm/48"	1320mm/52"	-	-
C	-	-	370mm/14.6"	370mm/14.6"
D	-	-	1220mm/48"	1320mm/52"

## OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black



## REVERSIBLE ROTATION

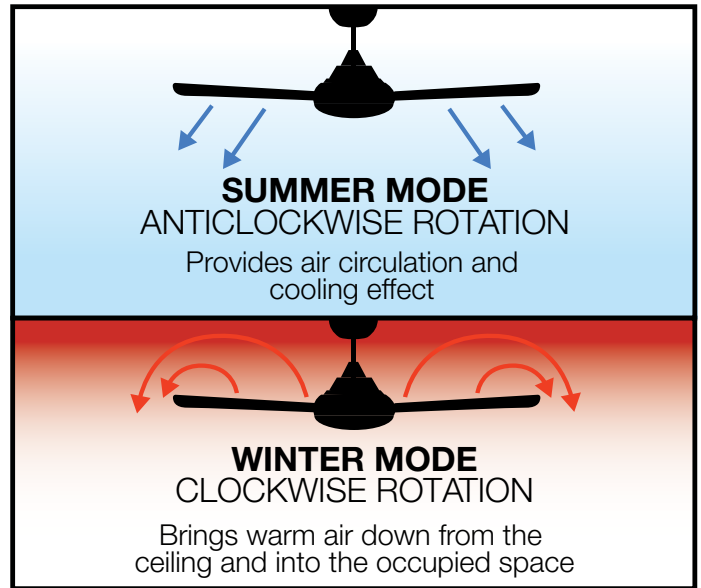


Mountable on ceilings with a maximum angle of 18°.

MODEL	FAN SIZE	COLOUR	LED LIGHT
QTN48WH	1220mm/48"	White	No
QTN48BK	1220mm/48"	Black	No
QTN52WH	1320mm/52"	White	No
QTN52BK	1320mm/52"	Black	No
QTN48WH-LED	1220mm/48"	White	Yes
QTN48BK-LED	1220mm/48"	Black	Yes
QTN52WH-LED	1320mm/52"	White	Yes
QTN52BK-LED	1320mm/52"	Black	Yes

MODEL	QTN48WH QTN48BK QTN48WH-LED QTN48BK-LED	QTN52WH QTN52BK QTN52WH-LED QTN52BK-LED
Max. Air Flow m <sup>3</sup> /hr	10,560	13,120
Watts	75	75
Volts	220-240	220-240
Hertz	50	50

LED LIGHT SPECIFICATIONS			
Lumens	1225	1450	1350
Light Colour Temperature	3000K	4000K	5700K



**Warm White**

(Colour Temperature: 3000K)



**Neutral White**

(Colour Temperature: 4000K)



**Cool White**

(Colour Temperature: 5700K)

Colour indicated in drawings above is for illustrative purposes only.



# FLAIR

## 3 BLADE CEILING FAN

# AeroGlide SYSTEM

**6\***  
YEAR WARRANTY

ULTRA  
QUIET



BUILT  
**Tough**  
FROM ABS

QUICK  
INSTALL

STRONG  
AIR FLOW

The Flair 3 blade ceiling fans feature a contemporary design to suit most modern apartments and homes. They include an innovative blade design that maximises air flow and provides excellent air circulation and cooling effect. The Flair range is engineered for fast and efficient installation, and fitted with a reliable high quality AC motor.

- Available in black or white, and with/without dimmable LED light.
- Pre-balanced for smoother, low noise operation.
- Made from durable ABS for a long working life.
- 18 watt dimmable LED light can be set to cool, neutral or warm white (LED light models only).
- Utilises the latest ceiling fan technology and design.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

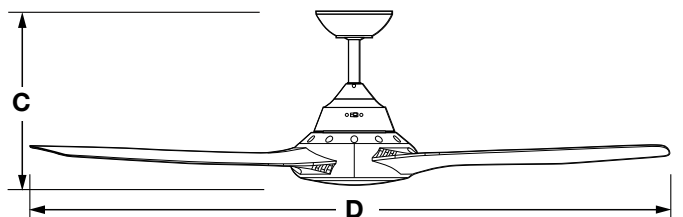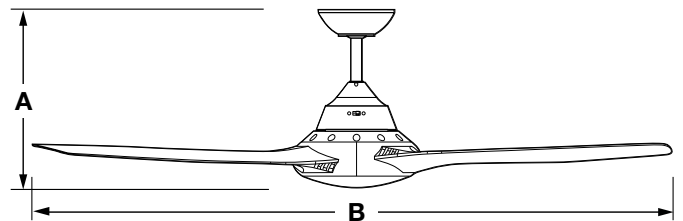

MODEL	FLR36WH FLR36BK	FLR50WH FLR50BK	FLR58WH FLR58BK	FLR36WH-LED FLR36BK-LED	FLR50WH-LED FLR50BK-LED	FLR58WH-LED FLR58BK-LED
A	360mm/14.2"	360mm/14.2"	360mm/14.2"	-	-	-
B	900mm/35.4"	1270mm/50"	1470mm/57.9"	-	-	-
C	-	-	-	355mm/14"	355mm/14"	355mm/14"
D	-	-	-	900mm/35.4"	1270mm/50"	1470mm/57.9"

### OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black



3 speed wall controller with light switch included.




Optional Remote Control (SFREMOTE)

\*Conditions apply.




MODEL	FAN SIZE	COLOUR	LED LIGHT
FLR36WH	900mm/35.4"	White	No
FLR36BK	900mm/35.4"	Black	No
FLR50WH	1270mm/50"	White	No
FLR50BK	1270mm/50"	Black	No
FLR58WH	1470mm/58"	White	No
FLR58BK	1470mm/58"	Black	No
FLR36WH-LED	900mm/35.4"	White	Yes
FLR36BK-LED	900mm/35.4"	Black	Yes
FLR50WH-LED	1270mm/50"	White	Yes
FLR50BK-LED	1270mm/50"	Black	Yes
FLR58WH-LED	1470mm/58"	White	Yes
FLR58BK-LED	1470mm/58"	Black	Yes

## REVERSIBLE ROTATION

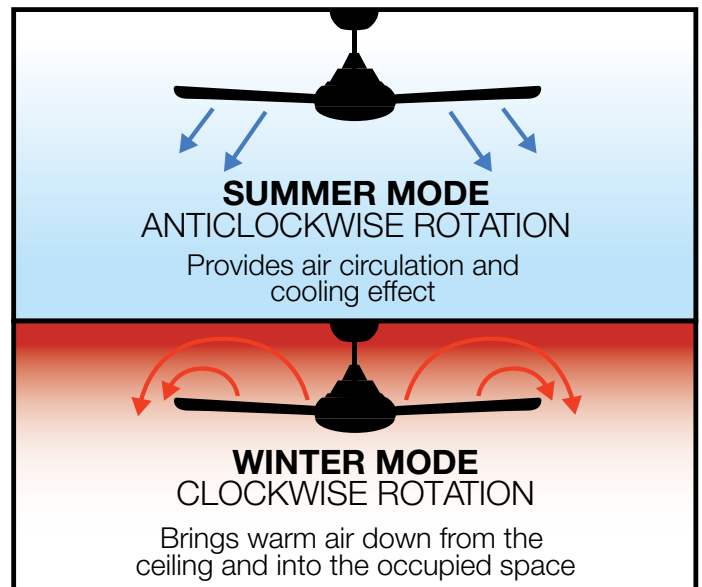


MODEL	FLR36WH FLR36BK FLR36WH-LED FLR36BK-LED	FLR50WH FLR50BK FLR50WH-LED FLR50BK-LED	FLR58WH FLR58BK FLR58WH-LED FLR58BK-LED
Max. Air Flow m <sup>3</sup> /hr	12,630	11,700	12,480
Watts	75	75	85
Volts	220-240	220-240	220-240
Hertz	50	50	50

LED LIGHT SPECIFICATIONS			
Lumens	1120	1330	1230
Light Colour Temperature	3000K	4000K	5700K

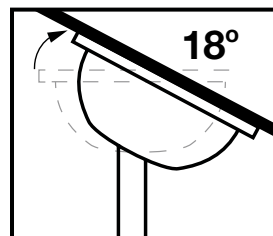

Mountable on ceilings with a maximum angle of 18°.




Warm White

(Colour Temperature: 3000K)



Neutral White

(Colour Temperature: 4000K)



Cool White

(Colour Temperature: 5700K)

Colour indicated in drawings above is for illustrative purposes only.



# AeroGlide

## SYSTEM

### JULIET

#### 4 BLADE CEILING FAN

**6\***  
YEAR WARRANTY

ULTRA  
QUIET

BUILT  
TOUGH


QUICK  
INSTALL

STRONG  
AIR FLOW

IP55

The Juliet 4 blade ceiling fan is certified with an IP55 dust and water protection rating which makes it ideal for pergolas and outdoor entertainment areas. It is pre-balanced for smoother, low noise operation and provides excellent cooling effect together with outstanding air circulation. The Juliet features a durable diecast aluminium motor housing and UV resistant ABS blades for a long working life.



- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Engineered for fast and efficient installation.
- IP55 dust and water protection rating makes it ideal for outdoor areas.
- Quick connect terminals simplify wiring.
- UV resistant ABS blades for a long working life.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

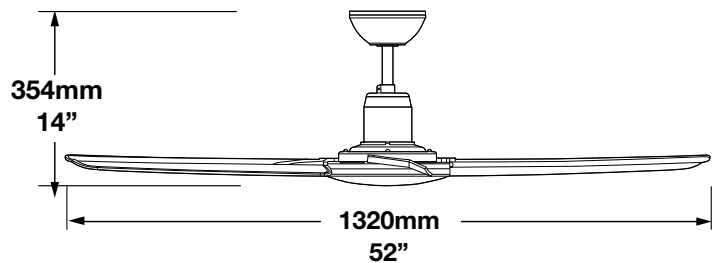

MODEL	JLT52WH
Max. Air Flow m <sup>2</sup> /hr	13,720
Watts	100
Volts	220-240
Hertz	50

### OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black

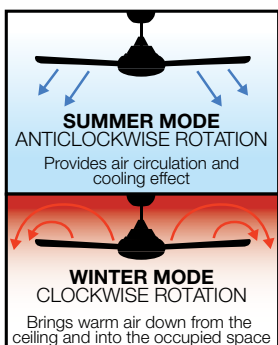

\*Conditions apply.

Mountable on ceilings with a maximum angle of 13°.



3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)



# SCUD

## 3 BLADE CEILING FAN

**3\***  
YEAR WARRANTY

ULTRA  
QUIET


BUILT  
*Tough*  
FROM ABS

QUICK  
INSTALL



STRONG  
AIR FLOW

The Scud 3 blade ceiling fan provides exceptional air circulation and cooling effect within indoor and covered outdoor areas. It is made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.

- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

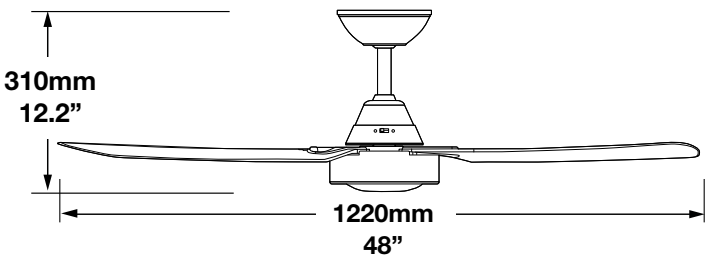

MODEL	SCU48WH
Max. Air Flow m <sup>3</sup> /hr	11,400
Watts	45
Volts	220-240
Hertz	50



\*Conditions apply.

Mountable on ceilings with a maximum angle of 18°.

### OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black



3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)