

TECHNICAL DATA

Fluke RLD2 HVAC/R Flashlight



Key features

- Six UV LEDs (395 nm wavelength) detect leak detection dyes
- Laser pointer clearly locates center of the UV field for accuracy
- Three LED flashlight with 100,000 hour LED life
- Operating temperature 0 °C to 50 °C
- Four operating modes: flashlight, UV light, laser light, UV/laser light combination
- Convenient detachable key chain carabiner and AAA battery included

Product overview: Fluke RLD2 HVAC/R Flashlight


UV Refrigerant leak Detector Flashlight

Leak detection made easy

The compact, easy-to-use, RLD2 UV flashlight uncovers refrigerant leaks instantly. Use the UV light to find the leakage area, then, use the laser pointer to pinpoint the exact leak location. With 100,000 hours of life, and four operating modes, this versatile leak detector is a must have for HVAC Technicians.



Ordering information

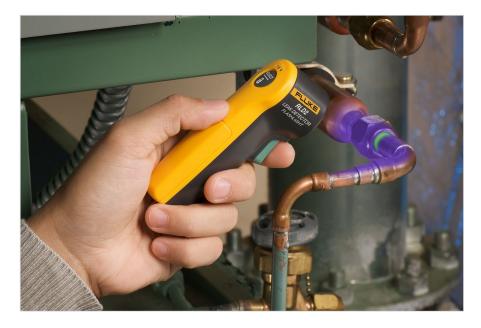

Fluke RLD2 Fluke RLD2 HVAC/R Flashlight

Includes:

• Leak Detector Flashlight



Fluke. Keeping your world up and running.®

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Australia Unit 26, 7 Anella Ave Castle Hill, NSW 2154 Australia Phone: 61 2 8850-3333 www.fluke.com.au ©2024 Fluke Corporation. All rights reserved. Specifications subject to change without notice. 07/2024

Modification of this document is not permitted without written permission from Fluke Corporation.