Spec Sheet: RS Fuse Fitting 32A

- Insulating sleeves to protect cable entry.
- Full shrouded contacts, IP20 degree of protection.
- Made from tough flame retardant non-hydroscopic material.
- Anti-vibration contact design.
- Tapered shank on fuse fixing screws, easy re-entry.

Standards
Australian Standard AS60269

Range

Rated current *(Ie)*	63A
Rated voltage *(Ue)*	690V
Rated peak withstand current	80kA
Rated impulse withstand voltage *(Uimp)*	8kV
Screw mounting size *(all)*	M5
Weight 1P *(Front wire)*	0.32kg
Max Cable Size *(front)*	50mm²
Max Cable Size *(rear)*	35mm²
Maximum tightening torque *(front)*	2.5-3Nm
Fuse type *(suit all)*	TIA/TIS_

Rated Current (A)	Type of Connection	Colour	Pack Quantity	Catalogue Number
63A	Front Wire	Black	10	**RS63H**
	Busbar / Front wire	Black		**RS63PH**
	2 Stud rear	Black		**RS63P**
	Back Wire	Black		**RS63BW**
	Front Wire	White		**RS63HWH**
	2 Stud rear	White		**RS63PWH**
	Solid Neutral Link	-	1	**RS63CLINK**
	Padlock barrier	Yellow	1	**RS63LOCK**
	Red safety handle	Red	1	**RS63RED**
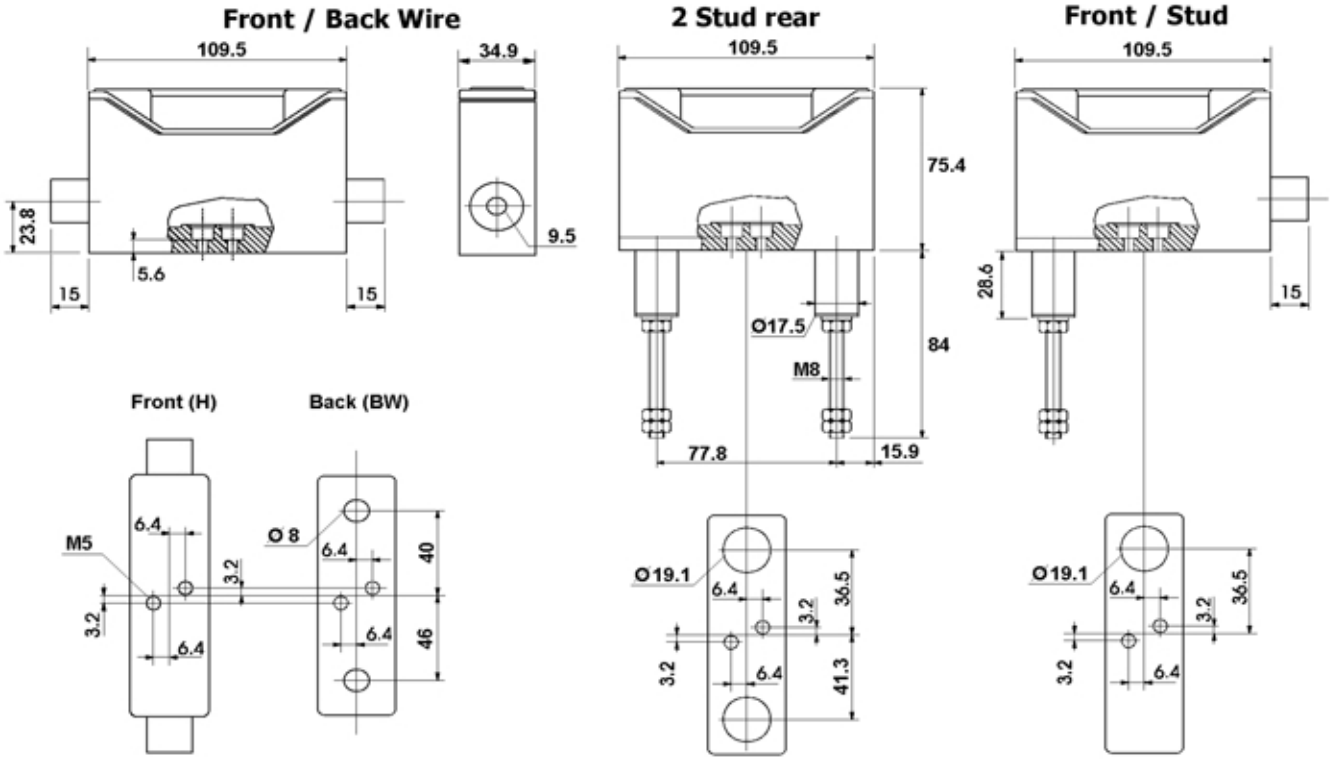
Dimensions