

Shadoweco LED Floodlight

SHADOWECO30CSLS

- One box solution with colour select and lumen select
- Bonus bracket for corner mounting for the small wattage 30W and 50W
- Anti-fog diffuser with breather in-built cable gland



LUMEN SELECT COLOUR SELECT

Performance

System Power	30W, 30W, 30W, 15W, 15W, 15W
Exit Lumen	2900lm, 3100lm, 3300lm, 1800lm, 1900lm, 1800lm
Efficacy	100lm/W
CCT	4000K, 6500K, 4000K, 3000K, 4000K, 6500K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	6SDCM
Ingress Protection Rating	IP65
Impact Rating	IK06
Beam Distribution	Symmetric
Beam Angle	100°
Warranty	3 Years
Lifetime	25,000hrs (L70/B50)


Physical

Dimensions	L150 x W35 x H177mm
Reflector	Aluminium
Diffuser	Tempered Glass
Luminaire Colour	Black
Weight	0.56kg
Luminaire Material	Aluminium (Die Cast)
Driver Location	Integrated
Heatsink	Aluminium (Die Cast)
Finish	Powder Coated
Installation	Trunnion

Electrical

Dimming	Non - Dimmable
Voltage	240V
Inrush Current	11A
Inrush Current Duration	288µs
Line Current	0.13A
Electrical Rating	Class 1

Line Drawings

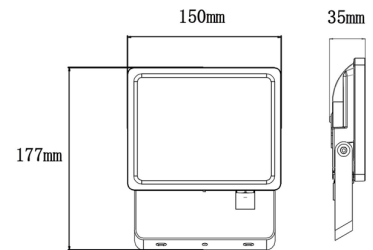

Product Images



