

Stingray 2 LED Exit Light

STLED-L

- Ceiling mount and optional wall mount
- Complete with replaceable lithium iron phosphate (LiFeP04) battery
- Optional IP65 KIT (See datasheet for Aqualock)



Performance

System Power	5W
Exit Lumen	124lm
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Warranty	3 Years
Lifetime	50,000hrs (L70/B50)

Physical

Dimensions	L395 x W81 x H245mm
Diffuser	Acrylic
Luminaire Colour	White
Weight	1kg
Luminaire Material	Plastic (Acrylic)
Driver Location	Integrated
Finish	White
Installation	Ceiling Surface Mounted

Electrical

Voltage	240V
Electrical Rating	Class 1


Emergency

Option	Maintained
Testing System	Manual
Battery	LiFePO4
Battery Voltage	3V
Battery Capacity	1500mA
Emergency Mode Wattage	1W
Emergency Mode Lumen	27lm
Classification	C0/C180:D3.2 C90/C270:E2 (2HR)
Viewing Distance	24m

AS/NZS 2293.1:2018 Classification Table

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)	
	C0/180	C90/C270
2.1	6.5	5
2.4	6.5	5.2
2.7	6.5	5.2

Line Drawings

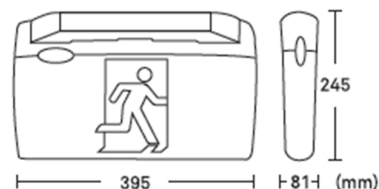



Accessories

BATPK1100/2L21	BATTERY LIFEP04 6.4V 1100MAH SBS 2CELLS / S PLUG 180MM
AQUALOCK-W	AQUALOCK W/PROOF EXIT ENCLOSURE WH/BASE
