



ARTURA

Residential Downlights



DIM
Phase Cut
Dimming



IP44
Ingress
Protection
Rating



UGR<19
Beam
Angle



IC-4
Covered &
Abutted



50,000hr
Expected
Lifetime



5yr
Warranty

Create ambient spaces.

ARTURA features a deep recessed design for a narrow beam angle to create ambient spaces. An additional pin-hole optic funnels the beam even further and makes it ideal for adding atmosphere to any apartment and hospitality project.

Features

- Deep recessed lens
- Modern and clean design
- Robust diecast aluminium construction
- Pin-hole accessory included
- IC-4 rating (ta 25°C)

Benefits

- Extra low glare
- High end appearance
- Improved thermal characteristics
- Reduce beam angle even further
- Allows for covered or abutted installation

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	FASCIA	SAP CODE	PRODUCT CODE
5W	300 lm	57 lm/W	2700K	Ø45mm	0.23kg	White	2002156	ARTURA5W-WH
						Black	2002155	ARTURA5W-BK
-	(150 lm)	(30 lm/W)	-	-	-	-	-	(with pin-hole installed)

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Clear)	Power Lead:	1.2m Flex & Plug
Fascia colour:	White: RAL9010 Black: RAL9004	Input:	220-240V, 50/60Hz
IP Rating:	Front: IP44 Body: IP40	Electrical Classification:	Class 2
IC Rating:	IC-4 (ta 25°C)	Power Factor:	>0.9
Beam Angle:	24° (19° with pin-hole)	Protection:	Overload / Short Circuit
CRI:	>80 (>90 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
UGR:	<19	Operating Ambient Temperature:	-20 to 45°C
SDCM:	<5 (<3 option)	Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge)

APPLICATIONS

Living Rooms
Hotels
Meeting rooms
Hallways



White




Black



(Pin-hole installed)

DIMENSIONS

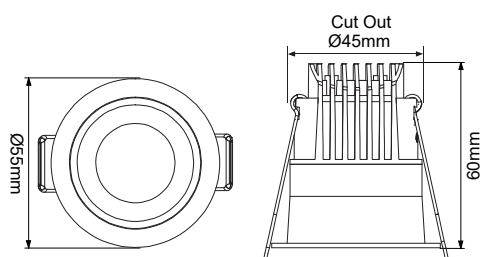

Remote Driver 109x40x22mm

ARTURA5W

FIND OUT MORE:

