



# DAWN HERO **NEW**

## Outdoor Bulkheads

  
**2 CCT**  
Colour  
Changeable

  
**2 POWER**  
Switchable  
Modes

  
**IP66**  
Ingress  
Protection  
Rating

  
**IK10**  
Impact  
Rating

  
**50,000hr**  
Expected  
Lifetime

  
**3yr**  
Warranty

### Sleek, beautiful and tough.

DAWN HERO is a sleek and elegant, yet robust and vandal proof bulkhead design. Retrofittable eyelid accessories are included in every model for increased flexibility and functionality. Suitable for up to +50°C ambient temperature (EM versions +40°C ) it is perfect for the warmer Australian climate.

### Features

- Sleek design, eyelid accessory included
- IP66 and IK10 ratings
- Hidden, recessed screw design
- Flicker-free
- Suitable for up to +50°C ambient temperature
- Dual power and dual CCT selectable
- Side cable entry option

### Benefits

- Flexibility in appearance and functionality
- Extremely robust and vandal resistant
- Unobtrusive appearance and added vandal resistance
- Supports the use of security cameras
- Ensured functionality in hot areas
- Reduced SKUs and inventory levels
- Allows conduit connection

**Product Overview**

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
9W	930 lm	105 lm/W	3000K	Ø300 x 86mm	0.7kg	2002287	<b>DN13WHR</b>
	990 lm	111 lm/W	4000K				
13W	1220 lm	95 lm/W	3000K	Ø300 x 86mm	0.8kg	2002288	<b>DN13WHR-MS</b>
	1300 lm	101 lm/W	4000K				
10W	960 lm	95 lm/W	3000K	Ø300 x 86mm	0.8kg	2002288	<b>DN13WHR-MS</b>
	1000 lm	99 lm/W	4000K				
14W	1250 lm	89 lm/W	3000K	Ø300 x 86mm	0.9kg	2002289	<b>DN13WHR-EM</b>
	1320 lm	93 lm/W	4000K				
11W	950 lm	88 lm/W	3000K	Ø300 x 86mm	0.9kg	2002289	<b>DN13WHR-EM</b>
	1000 lm	92 lm/W	4000K				
15W	1250 lm	84 lm/W	3000K	Ø300 x 86mm	1.0kg	2002290	<b>DN13WHR-MS-EM</b>
	1310 lm	88 lm/W	4000K				
12W	950 lm	80 lm/W	3000K	Ø300 x 86mm	1.0kg	2002290	<b>DN13WHR-MS-EM</b>
	990 lm	83 lm/W	4000K				
16W	1240 lm	78 lm/W	3000K	Ø300 x 86mm	1.0kg	2002290	<b>DN13WHR-MS-EM</b>
	1300 lm	82 lm/W	4000K				

**EM** = Emergency    **MS** = Intellisensor

**SPECIFICATIONS**

<b>Body Material:</b>	Polycarbonate	<b>Driver:</b>	Integral
<b>Diffuser Material:</b>	Polycarbonate (Opal)	<b>Power Connection:</b>	Terminal Block
<b>Body colour:</b>	Black	<b>Input:</b>	220-240V, 50/60Hz
<b>IP Rating:</b>	IP66	<b>Electrical Classification:</b>	Class 2
<b>IK Rating:</b>	IK10	<b>Power Factor:</b>	>0.9 (>0.7 EM and MS)
<b>Beam Angle:</b>	110°	<b>Protection:</b>	Overload / Short Circuit
<b>CRI:</b>	>80	<b>Lifespan:</b>	>50,000hrs @Ta25°C (L70)
<b>SDCM:</b>	<6	<b>Operating Ambient Temperature:</b>	-30°C to 50°C (Standard) -20°C to 50°C (MS) 0°C to 40°C (EM)
		<b>Dimming:</b>	Non-Dimmable

**APPLICATIONS**


Residential  
Schools  
Retail  
Factories  
Public Areas

**ACCESSORIES**

**Eyelid Cover**  
(Supplied with Product)




Without Eyelid



Eyelid cover installed

**DIMENSIONS**

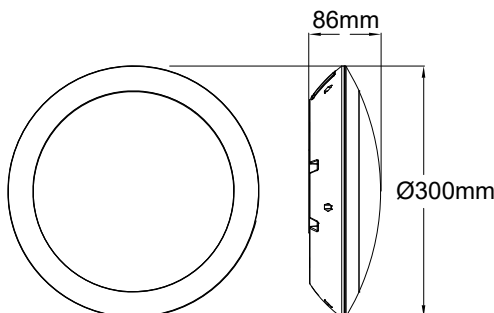

FIND OUT MORE:

