



# DULAR

DULAR-FIX-TRI

SAP CODE: 2001850

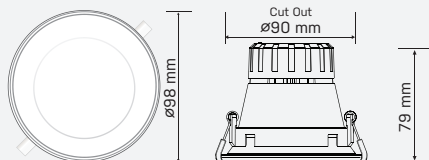

Photometric Diagram

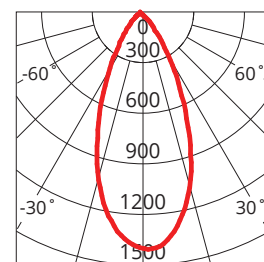

Unit: cd  
 - C0/180 45.0deg  
 - C90/270 45.0deg

9W, dimmable,  
switchable colour  
temperature, trimless

Trimless LED downlight with recessed lens to minimise glare

## KEY INFORMATION

Lumen Output	930 / 950 / 900lm
Input Power	9W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	Pending Approval

## PHOTOMETRIC

Efficacy	103 / 106 / 100lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	45°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	75VDC
Power Factor	>0.9
LED Input Current (nominal)	120mA
Useful life @Ta25° (L70)	35,000hr

## CONSTRUCTION

Housing	Aluminium + Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Metal Clip
Connection Type	1m Flex & Plug
Total Weight	0.25kg
Dimensions	Ø98 x 79mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.