



SKYLUX
LED Highbay



SKYLUX

A versatile, cost-efficient LED highbay.

Key Features

- 0-10V dimmable driver with 100-277v input range.
- Robust powder coated aluminium body.
- Optional quick-connect microwave motion sensor available with configuration remote control.
- 1.5m Flex and Plug for simple 'plug & play' installation.
- Excellent luminous efficacy of up to 161lm/W.
- Optional surface mount bracket & 90° low glare lens available.

Standards



Applications

Factories, Warehouses, Gyms, Indoor Sports Venues.



Accessories



SENSOR REMOTE CONTROL



MICROWAVE SENSOR



SURFACE MOUNT BRACKET

SKYLUX *LED Highbay*

The SKYLUX® LED highbay range offers the best in luminous efficacy with outstanding performance of up to 162lm/W. The high output LED array, coupled with a 110° beam angle provides a wide & uniform illuminance to the workspace. This results in the need for less fittings to complete an installation, resulting in substantial savings on the overall investment.


Factor in the 'smart' technology and that's when it gets interesting. Add the optional sensor & you can configure each highbay to run at 10% of its full power when no movement is detected. This feature enables the fitting to remain on and draw as little as 12W of power in standby mode, then instantly power up to 100% when it detects movement. The sensor range, dimming level and time it remains at full brilliance for can all be programmed with the optional remote control.

Welcome to the next generation in industrial lighting. Welcome to SKYLUX®.


| POWER | LUMEN | lm/W | CCT | WEIGHT | SAP CODE | PRODUCT CODE |
|-------|---------|---------|-------|--------|----------|--------------------|
| 120W | 18200lm | 152lm/W | 5000K | 3.00kg | 2001896 | SKYLUX-120W |
| 150W | 24140lm | 161lm/W | 5000K | 4.00kg | 2001897 | SKYLUX-150W |
| 200W | 31460lm | 157lm/W | 5000K | 5.00kg | 2001898 | SKYLUX-200W |

| ACCESSORIES | FEATURES | SAP CODE | PRODUCT CODE |
|--------------------------|--------------------------------------|----------|--------------------------|
| Microwave Motion Sensor | Quick-connect with corridor function | 2001899 | SKYLUX-MS |
| Sensor Remote Controller | Configures microwave motion sensor | 2001901 | SKYLUX-REMOTE |
| Surface Mount Bracket | Matte black steel | 2001902 | SKYLUX-BRACKET |
| 90° Low Glare Lens | Improved glare & beam | 2001906 | SKYLUX-90DIF-M |
| SunMax Sensor | Daylight harvesting sensor | 2000878 | SUNMAX50MA-W-IP20 |


Dimensions and Diagrams

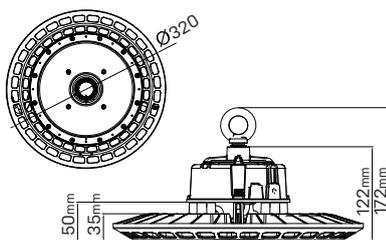


SKYLUX 120W

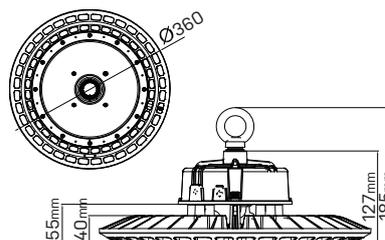


SKYLUX 150W

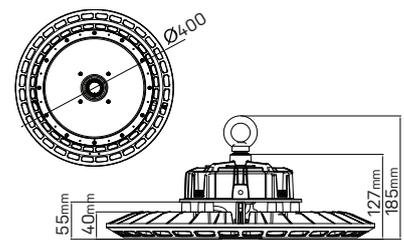


SKYLUX 200W



Unit: cd
 - C0/180 111.9deg
 - C90/270 114.6deg



Unit: cd
 - C0/180 111.9deg
 - C90/270 114.6deg



Unit: cd
 - C0/180 111.9deg
 - C90/270 114.6deg



Available from: