


# STAX<sup>ECO</sup>

**STAX150W4K**

SAP CODE: 2002133

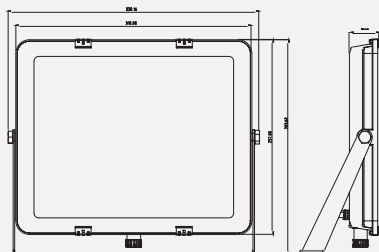


## A versatile and efficient LED floodlight

The STAX ECO is the next generation in our versatile and efficient LED floodlight range. With a range of power from 20W to 200W it is excellent for a wide number of applications.



Photometric Diagram



Unit: cd

- C0/180 114.7deg

- C90/270 114.6deg

### KEY INFORMATION

Watts	150W
Input Power	150W
Lumen Output (p/metre)	15560lm
Install	Surface Mount
Dimming Options	Non-Dimmable
Fitting Colour	Matte Black
Warranty	3 years
IP Rating	IP66
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approval	IPART LCP 155.5

### PHOTOMETRIC

Efficacy	104lm/W
LED	SMD
CCT	4000K
Beam Angle	110°

### ELECTRICAL

Driver	Integral (DOB)
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	-
Power Factor	>0.9
LED Input Current (nominal)	-
Useful life @Ta25° (L70)	-

### CONSTRUCTION

SCDM	<5
Housing	Die-cast Aluminum
Optics	Glass Lens
Adjustable Angle	N/A
Fixings/Hardware	Mounting bracket
Connection Type	1m Flex
Total Weight	2.4kg
Dimensions	310x257x40mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

### ACCESSORIES



STAX90D-BRKT-L