


STAX^{ECO}

STAX200W4K
 SAP CODE: 2002134

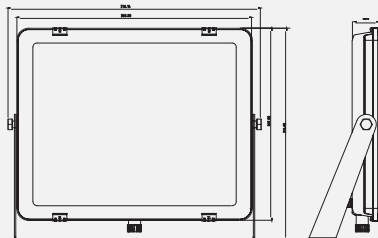


A versatile and efficient LED floodlight

The STAX ECO is the next generation in our versatile and efficient LED floodlight range. With a range of power from 20W to 200W it is excellent for a wide number of applications.



Photometric Diagram



Unit: cd
 - C0/180 114.7deg
 - C90/270 114.9deg

KEY INFORMATION

| | |
|------------------------|-----------------|
| Watts | 200W |
| Input Power | 200W |
| Lumen Output (p/metre) | 19560lm |
| Install | Surface Mount |
| Dimming Options | Non-Dimmable |
| Fitting Colour | Matte Black |
| Warranty | 3 years |
| IP Rating | IP66 |
| IK Rating | IK08 |
| IC Rating | N/A |
| Rebate Scheme Approval | IPART LCP 203.5 |

PHOTOMETRIC

| | |
|------------|--------|
| Efficacy | 98lm/W |
| LED | SMD |
| CCT | 4000K |
| Beam Angle | 110° |

ELECTRICAL

| | |
|-----------------------------|----------------------|
| Driver | Integral (DOB) |
| Supply Input | 220-240Va.c. 50/60Hz |
| Driver Output Voltage | - |
| Power Factor | >0.9 |
| LED Input Current (nominal) | - |
| Useful life @Ta25° (L70) | - |

CONSTRUCTION

| | |
|---------------------------|-------------------|
| SCDM | <5 |
| Housing | Die-cast Aluminum |
| Optics | Glass Lens |
| Adjustable Angle | N/A |
| Fixings/Hardware | Mounting bracket |
| Connection Type | 1m Flex |
| Total Weight | 2.8kg |
| Dimensions | 350x287x40mm |
| Operating Ambient Temp. | -20 to 45°C |
| Electrical Classification | Class 1 |

ACCESSORIES



STAX90D-BRKT-L