



# VIVA<sup>LP</sup>

## Residential Downlight



**>85**  
CRI Colour  
Rendering  
Index



**100°**  
Beam  
Angle



**IP44\***  
Ingress  
Protection  
Rating  
\*From below only



**IC-4**  
Covered &  
Abutted



**102,000hr**  
Projected  
Lifespan



**5yr**  
Warranty

**A compact and complete luminaire.**

**VIVA LP** from Haneco has become the new benchmark for conventional home lighting systems. The VIVA LP features tritone colour technology, dimming capabilities, and high efficacy outputs all wrapped in a small housing that can meet any installation requirement, helping it to maintain its status as the industry standard for home lighting.

### Features

- Low profile design
- Tritone colour changeable
- IC-4 rating (ta 25°C)
- Dimmable driver
- Flush fascia trim
- Modernised design
- High ambient temperature rating (>40°C)
- Various accessories available
- Optional clip-on trims available

### Benefits

- Suitable for very shallow ceiling spaces;
- Provides the choice of light hues from a single luminaire;
- Allows for covered and abutted installations;
- Adjustable brightness to improve comfort;
- Provides unobtrusive design appearance;
- Provides high end appearance;
- Long lasting in hot environments;
- Tailor the luminaire to meet the application requirements;
- Extend the design style of the environment

Product Overview


POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	PRODUCT CODE
8 W	800 / 850 / 800 lm	100 / 106 / 100 lm/W	3000 / 4200 / 5700 K	0.2 kg	2002396	VIVA-LP

**SPECIFICATIONS**

Body Material: Polycarbonate	Driver: Integral	Dimming: Phase-Cut Dimmable
Diffuser Material: Polycarbonate (Opal)	Connection Type: 1m Flex & Plug	<b>APPLICATIONS</b> Bedrooms Lounge Room Dining Area Laundry Butler Pantry Hallways Entrance Staircase Bathrooms Ensuite Theatre Rooms Games Rooms Function Areas Hotel Rooms Kitchen / Food Prep
Body colour: White	Input: 220-240Va.c. 50/60Hz	
Fascia colour: White RAL 9003	Electrical Classification: Class II	
IP Rating: IP44	Power Factor: > 0.5	
Beam Angle: 100°	Protection: Overload / Short Circuit	
CRI: > 85	Lifespan: >102,000hrs@Ta25°C(L70)	
SDCM: < 3	Operating Ambient Temperature: -20 to 40°C	
IC Rating: IC-4	Smart: KASTA Compatible	

Residential Downlights

**DIMENSIONS (mm)**

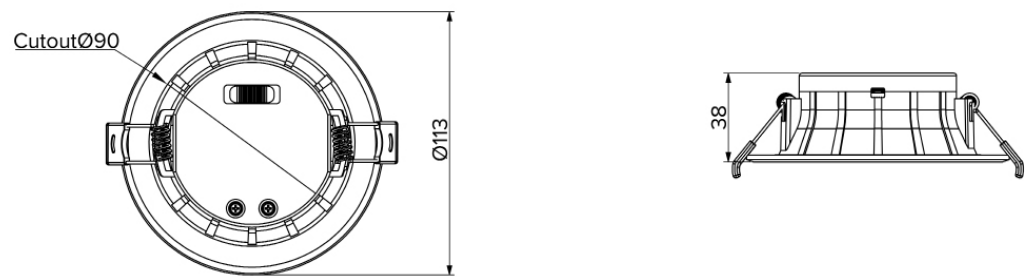


**ACCESSORIES**

Description	Product Code
Clip-on Trim Black	TRIM-VIVA-BLK
Clip-on Trim Gold	TRIM-VIVA-GLD
Clip-on Trim Nickel	TRIM-VIVA-NKL



Description	Product Code
Adaptor Ring (Cut Out Ø100-125 mm)	TRIM-VIVA-130
Adaptor Ring (Cut Out Ø120-165 mm)	TRIM-VIVA-170

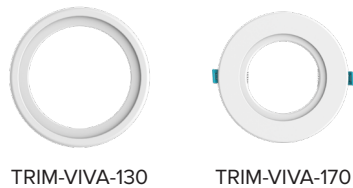

Description	Product Code
Surface Mount Kit	SM-ENC-DL
Suspension Kit	SM-ENC-SUSKIT

