

NEXT CREATION™ V2 CEILING FAN



Matt Black

Installation Locations:

Coastal, indoor and outdoor locations. The fan is also suitable for installation in a pergola or outside in a sheltered area, protected from wind.

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Motor:

156mm x 12mm DC motor
Made with high grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Top Canopy & Downrod:

Materials: ABS Polymer & Aluminium

Product Range:

NC2151 - White with White Blades
NC2152 - Matt Black with Matt Black Blades

Blades:

Sizes: 1320mm (52")
Materials: Polymer Blades
Blade Pitch: 14.5°

Extra Information:

Introduced into the HPI range in 2022
9 speed remote controller
Reversible

Airflow CMH:

14,315 on High Speed (Speed 9)

Warranty*:

2 years in-home warranty on all electric components
(control modules, remote control system, lighting and accessory wall control)
3 years standard "in home" warranty
3 years extended warranty on motor only (excluding labour)

Standard Canopy Cover:

Suitable for flat ceilings

Weight Including Packaging:

Complete fan: 7.7kg

Packaging Dimensions (CM):

Complete Fan: 61.7L x 28.2W x 31.5H

Accessories (Supplied separately):

Down Rod 26mm diameter (includes wire harness)

- DC2480 - 91cm White Downrod
- DC2481 - 91cm Black Downrod
- DC2482 - 91cm B/Alum Downrod
- DC2490 - 180cm White Downrod
- DC2491 - 180cm Black Downrod
- DC2492 - 180cm B/Alum Downrod

38° Ceiling Kit* (for pitched ceilings)

- 080 - Ceiling Kit White 38°
- 082 - Ceiling Kit Painted Silver 38°
- 083 - Ceiling Kit Black 38°

009 - T-Hook for ceiling roses

DCWC240 - 240V DC Wall Controller


WIFIM099 - Tuya WiFi Module

PIXIEM098 - Pixie HPI Ceiling Fan Module

*For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

	Speed 1	Speed 2	Speed 3	Speed 4	Speed 5	Speed 6	Speed 7	Speed 8	Speed 9
RPMS	80	95	147	162	180	190	203	211	221
WATTS	2.7	3.7	9.5	12.4	15.3	17.9	20.8	22.7	25.4

Dimensions

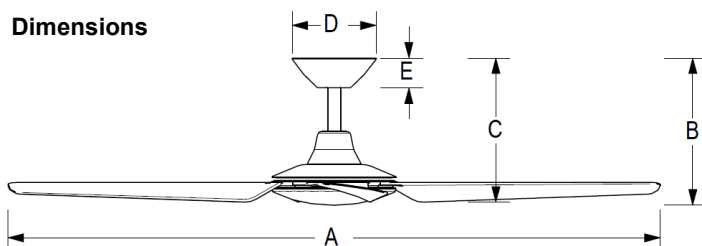

A	B	C	D	E
1520mm	310mm	300mm	168mm	60mm