# Catalogue No: CA7-16-10-240VAC

### CONTACTOR 7.5kW 3P 240V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil





Contactor 3 pole 16A 7.5kW 1N/O Auxiliary 240V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

Representative Photo Only (actual product may vary based on configuration selections)


| SPECIFICATIONS                                   |                    |
|--|--------------------|
| Product Series                                   | CA7-16             |
| Component Type Motor Control and Drives          | Standard Contactor |
| le, Rated Operational Current, AC-1, 415V, 40°C  | 32 A@415V,40°C     |
| kW Rating, AC-3, 415V, 60°C                      | 7.5 kW @415V, 60°C |
| le, Rated Operational Current, AC-3, 415V, 60°C  | 16 A@415V,60°C     |
| kW Rating, AC-3, 690V, 60°C                      | 7.5 kW @690V, 60°C |
| le, Rated Operational Current, AC-3, 690V, 60°C  | 9 A@690V,60°C      |
| Number of Poles                                  | 3                  |
| Contact Configuration, Main Poles                | 3 NO main poles    |
| Contact Configuration, Auxiliary                 | 1 NO auxiliary     |
| Coil Type  | Conventional type  |
| Coil Consumption Hold-in VA AC coiled contactors | 2.7 VA<br>9.5      |
| Coil Consumption Pickup VA AC coiled contactors  | 75 VA              |
| Integrated Aux                                   | 1 N/O              |
| Coil Voltage                                     | 240 V AC V         |
| Un, Coil Voltage, AC @50Hz, Nom                  | 240 V AC nom @50Hz |
| Un, Coil Voltage, AC @50Hz, Min                  | 204 V AC min @50Hz |
| Un, Coil Voltage, AC @50Hz, Max                  | 264 V AC max @50Hz |
| Un, Coil Voltage, AC @60Hz, Nom                  | 277 V AC nom @60Hz |
| Un, Coil Voltage, AC @60Hz, Min                  | 235 V AC min @60Hz |
| Un, Coil Voltage, AC @60Hz, Max                  | 304 V AC max @60Hz |
| Tightening Torque, Power Terminals, max          | 2 Nm max           |
| IP Rating  | IP20               |




## Catalogue No: CA7-16-10-240VAC

#### CONTACTOR 7.5kW 3P 240V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

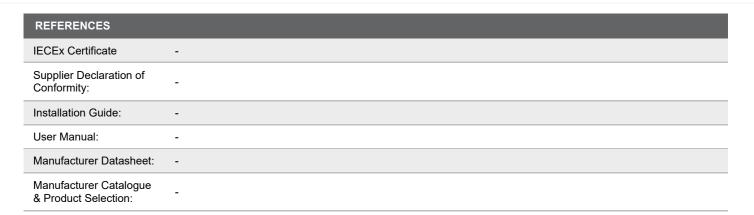

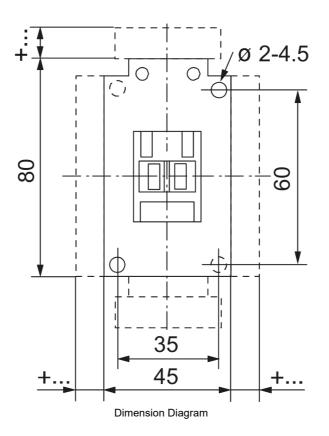



## Catalogue No: CA7-16-10-240VAC

### CONTACTOR 7.5kW 3P 240V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



