Catalogue No: CA7-30-00-240VAC

CONTACTOR 15kW 3P 240V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil





Representative Photo Only (actual product may vary based on configuration selections)

Contactor 3 pole 30A 15kW 240V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

SPECIFICATIONS	
Product Series	CA7-30
Component Type Motor Control and Drives	Standard Contactor
le, Rated Operational Current, AC-1, 415V, 40°C	65 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	15 kW @415V, 60°C
le, Rated Operational Current, AC-3, 415V, 60°C	30 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	15 kW @690V, 60°C
le, Rated Operational Current, AC-3, 690V, 60°C	18 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	3.1 VA 12.3
Coil Consumption Pickup VA AC coiled contactors	105 VA
Integrated Aux	No Auxiliary Contacts
Coil Voltage	240 V AC V
Un, Coil Voltage, AC @50Hz, Nom	240 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	204 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	264 V AC max @50Hz
Un, Coil Voltage, AC @60Hz, Nom	277 V AC nom @60Hz
Un, Coil Voltage, AC @60Hz, Min	235 V AC min @60Hz
Un, Coil Voltage, AC @60Hz, Max	304 V AC max @60Hz
IP Rating	IP20




Catalogue No: CA7-30-00-240VAC

CONTACTOR 15kW 3P 240V AC COIL

 ${\it Motor Control \ and \ Drives > Motor \ Starting \ and \ Protection > Contactors > Sprecher + Schuh \ Contactors > CA7 \ Contactors 4 to 55kW > 3 Pole \ Contactors \ with \ AC \ Coil}$



REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

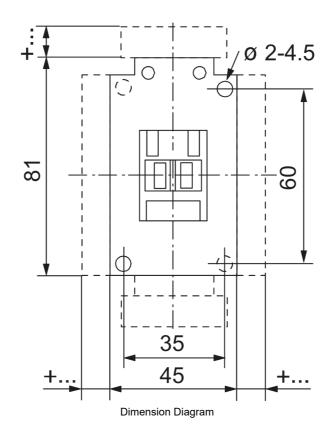



Catalogue No: CA7-30-00-240VAC

CONTACTOR 15kW 3P 240V AC COIL

 ${\it Motor Control \ and \ Drives > Motor \ Starting \ and \ Protection > Contactors > Sprecher + Schuh \ Contactors > CA7 \ Contactors 4 to 55kW > 3 Pole \ Contactors \ with \ AC \ Coil}$



Mounting Position 250

Technical Diagram

enrachar_