


Catalogue No: CA7-30-00-24VAC

CONTACTOR 15kW 3P 24V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

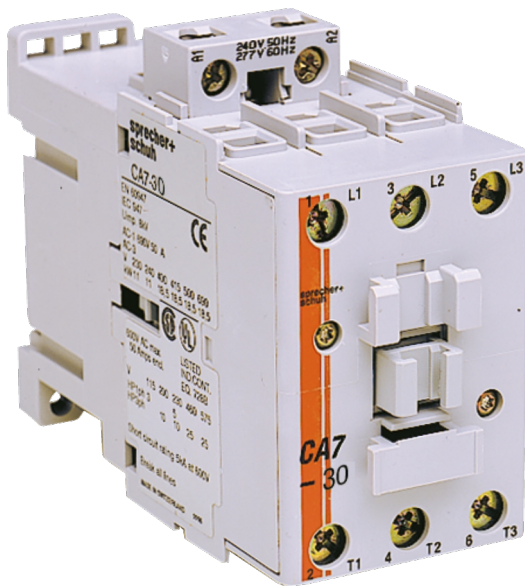

Contactor 3 pole 30A 15kW 24V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CA7-30
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	65 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	15 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	30 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	15 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	18 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	3.1 VA 12.3
Coil Consumption Pickup VA AC coiled contactors	105 VA
Integrated Aux	No Auxiliary Contacts
Coil Voltage	24 V AC V
Un, Coil Voltage, AC @50Hz, Nom	24 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	21 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	27 V AC max @50Hz
IP Rating	IP20

Catalogue No: CA7-30-00-24VAC

CONTACTOR 15kW 3P 24V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



REFERENCES

IECEX Certificate -


Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -

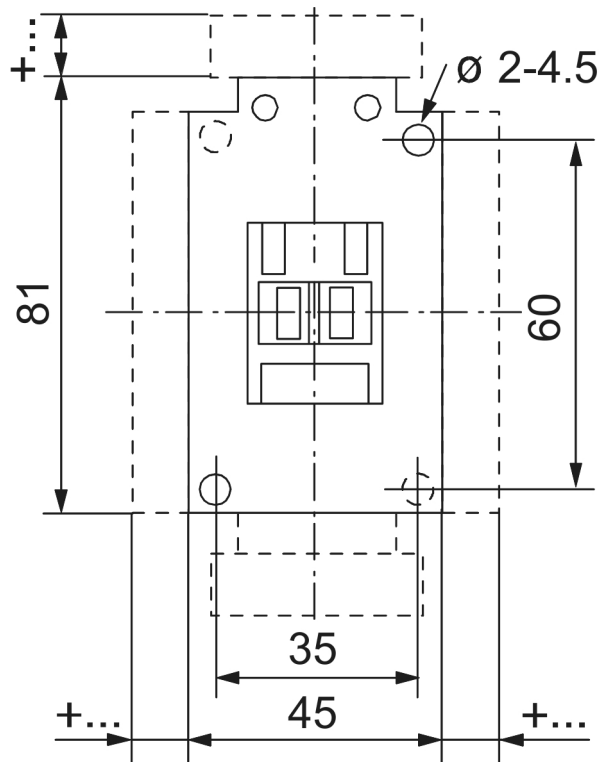

Dimension Diagram

Catalogue No: **CA7-30-00-24VAC**

CONTACTOR 15kW 3P 24V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

