

# Catalogue No: CA7-72-00-240VAC

## CONTACTOR 37kW 3P 240V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



Representative Photo Only  
(actual product may vary based on configuration selections)

### Contactor 3 pole 72A 37kW 240V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

#### SPECIFICATIONS

Product Series	CA7-72
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	100 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	40 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	72 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	40 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	42 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	6.5 VA 19
Coil Consumption Hold-in W DC coiled contactors	4.5 W
Coil Consumption Pickup VA AC coiled contactors	235 VA
Coil Consumption Pickup W DC coiled contactors	200 W
Integrated Aux	No Auxiliary Contacts
Coil Voltage	240 V AC V
Un, Coil Voltage, AC @50Hz, Nom	240 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	204 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	264 V AC max @50Hz
Un, Coil Voltage, AC @60Hz, Nom	277 V AC nom @60Hz
Un, Coil Voltage, AC @60Hz, Min	235 V AC min @60Hz
Un, Coil Voltage, AC @60Hz, Max	304 V AC max @60Hz
IP Rating	IP20

# Catalogue No: CA7-72-00-240VAC

## CONTACTOR 37kW 3P 240V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



### REFERENCES

IECEX Certificate -


Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -

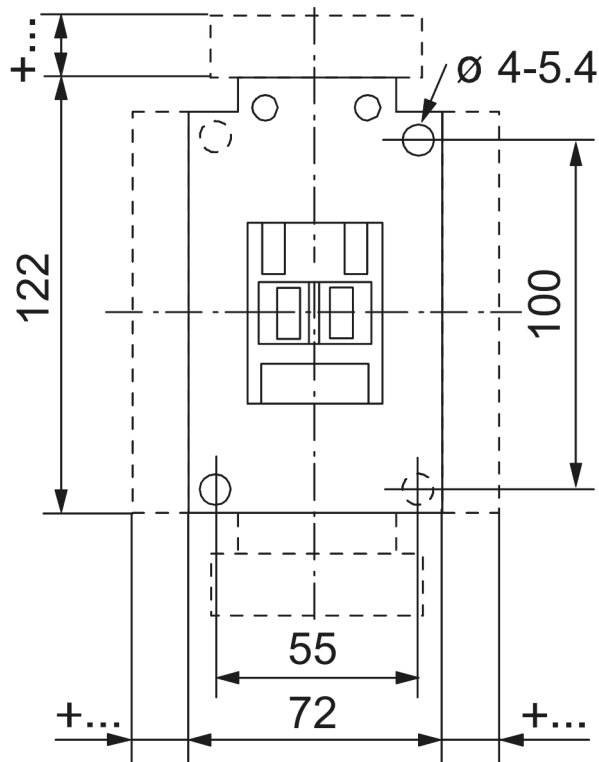

Dimension Diagram