

# Catalogue No: **DTCB10120C**

## MCB DIN-T10 10kA 1P 20A C CURVE

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Miniature Circuit Breakers > DIN-T10 > C-Curve (5 - 10 In)



Representative Photo Only  
(actual product may vary based on configuration selections)

### MCB 10KA 1P 20A C CURVE DIN

- Complies with AS/NZS 60898 and AS/NZS 60947-2 (as applicable)
- DIN-T10 MCBs feature 10kA short circuit rating
- B curve for long cable runs when fault loop impedance become an issue
- C curve for general light, power and motor starting applications
- D trip curve for high inrush, motor starting and transformer applications
- Pad lockable and sealable toggle restricts unauthorized action
- Large capacity terminals
- Fast connection pin/fork busbar comb or NC or GB busbar chassis
- Suits pole-covers, loadcentres and the Concept range of Panelboards
- Approval No. N17481 or RCM

#### SPECIFICATIONS

Product Series	DIN-T
Component Type Power Distribution & Protection	MCB
Trip Curve	C
In, Rated Current at 30°C	20 A @30°C
Poles	1P
Neutral Pole Protected	Yes
Rated Frequency	50 / 60 Hz
Un, Nominal Operational Voltage, AC	240 V AC
Un, Nominal Operational Voltage, DC	48 V DC
Details, Trip Characteristics	@400Hz = 1.5 x mag. trip; @DC = 1.4 x mag. trip
U <sub>bmin</sub> , Service Voltage, AC, Min	12 V AC
U <sub>bmax</sub> , Service Voltage, AC, Max	250 V AC
U <sub>bmin</sub> , Service Voltage, DC, Min	12 V DC
U <sub>bmax</sub> , Service Voltage, DC, Max	53 V DC
Isolator Application, IEC 60947-2	Yes
Impulse Withstand Test Voltage	6 kV
Insulation Resistance	10000 MΩ
Dielectric Strength	2.5kV V AC
Electrical Service Life at Un, In	10000 cycles
Mechanical Service Life	20000 cycles
Utilisation Category	A
IP Rating, Inside	IP40
IP Rating, Outside	IP20
Flammability Rating (UL94)	UL 94 V-2
Wire / Conductor Size, Rigid Cable, In, Min	1 mm <sup>2</sup> In
Wire / Conductor Size, Rigid Cable, Top, Max	35 mm <sup>2</sup> Top
Wire / Conductor Size, Rigid Cable, Out, Min	1 mm <sup>2</sup> Out
Wire / Conductor Size, Flex Cable, Top, Max	25 mm <sup>2</sup> Top

# Catalogue No: **DTCB10120C**

## MCB DIN-T10 10kA 1P 20A C CURVE

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Miniature Circuit Breakers > DIN-T10 > C-Curve (5 - 10 In)



Wire / Conductor Size, Flex Cable, In, Min	0.75 mm <sup>2</sup> In
Wire / Conductor Size, Rigid Cable, Bottom, Max	35 mm <sup>2</sup> Bottom
Wire / Conductor Size, Flex Cable, Out, Min	0.75 mm <sup>2</sup> Out
Wire / Conductor Size, Flex Cable, Bottom, Max	25 mm <sup>2</sup> Bottom
Tightening Torque, Top, Nominal	4.5 Nm
Tightening Torque, Bottom, Nominal	4.5 Nm
Busbar System, Top	Pin
Busbar System, Bottom	Fork Pin
Trip-Free Mechanism	Yes
Mounting	DIN-35 Rail Mount
Add-On Devices (side add-on)	Motor Operator Auxiliary Contacts UVT Shunt Trip Panelboard Switch
Sealable	Yes
Centre Trip Position	No
Accessories	Yes
Icn, Rated Short-Circuit Capacity, 1P, 230/400V AC	10 kA
Ics, Rated Service Short-Circuit Breaking Capacity, AC (IEC 60898)	75 % Icn
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 127V AC, 1P	30 kA @127VAC, 1P
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 220/240V AC	15 kA @220/240VAC
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 400/415V AC	4 kA @400/415VAC
Ics, Rated Service Short-Circuit Breaking Capacity, AC (IEC 60947)	50 % Icu
Icu, Rated Ultimate Short-Circuit Breaking Capacity, <=60V DC	25 kA
Ics, Rated Service Short-Circuit Breaking Capacity, DC	100 % Icu
NEMA AB1, Short-Circuit Capacity, 120/240V AC	30 kA
Height	86 mm
Width	18 mm
Depth	76 mm
Weight	0.12 kg
Package Quantity	12 qty
Approval(s)	N17481
Neutral Pole Switched	Yes
Operating Temperature, Min	-25 °C min
Operating Temperature, Max	55 °C max
Storage Temperature, Min	-55 °C min
Storage Temperature, Max	55 °C max
Relative Humidity, Max	95 %RH
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 240V AC, 1P	15 kA @240VAC, 1P
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 415V AC, 1P	4 kA @415VAC, 1P
Icu, Rated Ultimate Short-Circuit Breaking Capacity, 60V DC, 1P	25 kA @60VDC, 1P
Vibration Acceleration (Max.)	3 m/s <sup>2</sup>
Vibration Rating	IEC 60077-16-3

# Catalogue No: **DTCB10120C**

## MCB DIN-T10 10kA 1P 20A C CURVE

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Miniature Circuit Breakers > DIN-T10 > C-Curve (5 - 10 In)



### Standards Compliance

IEC 60898  
IEC 60077-16-3  
IEC 60947-2  
IEC 60068-2  
DIN 40046  
UL 94 V-2  
AS/NZS 3111:2009

### Certifications

CE  
RCM

### REFERENCES

IECEx Certificate

-

Supplier Declaration of Conformity:

[DTCB10xxx\\_Supplier Declaration of Conformity \(SDoC\)](#)

Installation Guide:

-

User Manual:


-

Manufacturer Datasheet:

-

Manufacturer Catalogue & Product Selection:

-

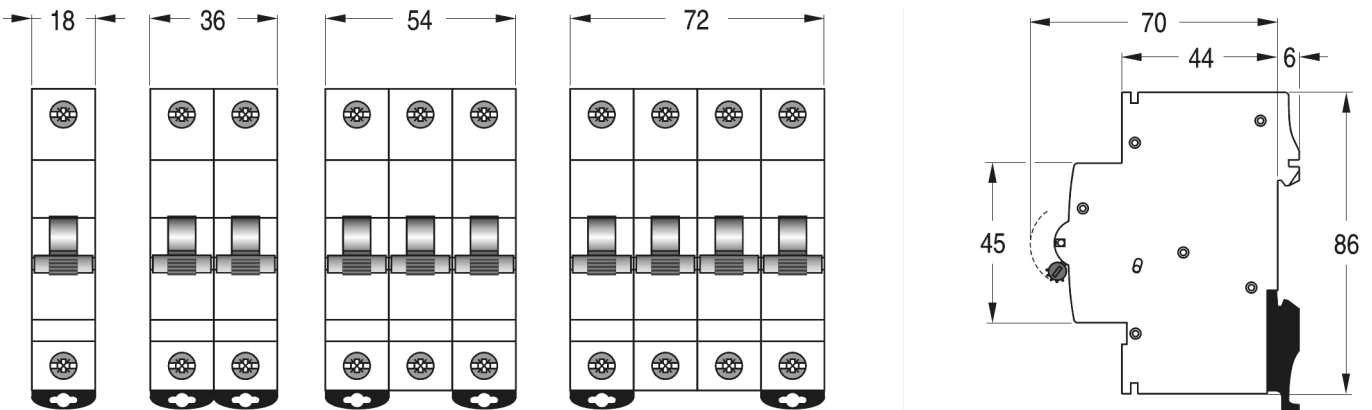

Dimension Diagram