

Lighting

PHILIPS

TL-D Colored

TL-D Colored 36W Yellow 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Voltage (Nom)	103 V
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		
Life To 10% Failures (Nom)	12000 h	Temperature	
Life to 50% Failures (Nom) 15000 h		Design Temperature (Nom) 25 ℃	
Light technical		Controls and dimming	
Color Code	160	Dimmable	Yes
Luminous Flux (Nom)	1580 lm		
uminous Flux (Rated) (Nom)	1580 lm	Mechanical and housing	
Color Designation	Yellow	Bulb Shape	T8 [26 mm (T8)]
LMF 2000 h Rated	85 %		
		Approval and application	
Operating and electrical		Mercury (Hg) Content (Nom)	13.0 mg
Power (Nom)	36.0 W	Energy Consumption kWh/1000 h	44 kWh
Lamp Current (Nom)	0.440 A		

TL-D Colored

Product data			
Full product code	871150072751040		
Order product name	TL-D Colored 36W Yellow 1SL/25		
EAN/UPC - Product	8711500727510		
Order code	928048501605		
Numerator - Quantity Per Pack	1		

Numerator - Packs per outer box	25
Material Nr. (12NC)	928048501605
Net Weight (Piece)	135.000 g

Dimensional drawing

Photometric data


% 100

80


60

40 20

300

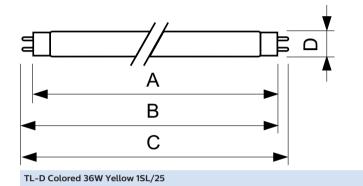

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
Yellow 1SL/25					

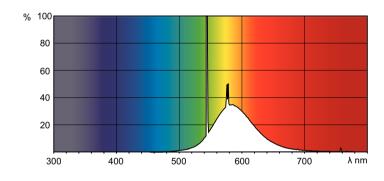

LDPB_TL-DCOL_160-Spectral power distribution B/W

500

600

700

lnm

400

LDPO_TL-DCOL_160-Spectral power distribution Colour



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, January 14 - data subject to change