



TL-E 80

TL-E 22W/840 1CT/20

Fluorescent lamps with a circular tube having a diameter of 26 mm


Product data

General Information	
Cap base	G10Q [G10q]
Life to 50% failures (nom.)	13000 h
LSF 2000 h Rated	80 %
LSF 4000 h Rated	74 %
LSF 6000 h Rated	70 %
LSF 8000 h Rated	67 %
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Lamp Luminous Flux 25°C EL (Nom)	1285 lm
Lamp Luminous Flux (Nom)	1285 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	59 lm/W
Colour Rendering Index,horiz (Nom)	80
LLMF 2000 h Rated	90 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	85 %
LLMF 8000 h Rated	84 %
Operating and Electrical	
Power (Rated) (Nom)	22 W
Lamp current (nom.)	0.400 A
Voltage (Nom)	62 V

Temperature	
Design temperature (nom.)	25 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb shape	C-T9 [C-T 29 mm (C-T9)]
Approval and Application	
Mercury (Hg) content (nom.)	8 mg
Energy consumption kWh/1,000 hours	24 kWh
Product Data	
Full product code	871150028665900
Order product name	TL-E 22W/840 1CT/20
EAN/UPC – product	8711500286659
Order code	928026284074
SAP numerator – quantity per pack	1
Numerator – packs per outer box	20
SAP material	928026284074
SAP net weight (piece)	0.110 kg
ILCOS code	FSC-22/40/1B-E-G10q-29/210

TL-E 80


Dimensional drawing




TL-E 22W/840 1CT/20

Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 22W/840 1CT/20	30.9 mm	26.2 mm	205.0 mm	213.5 mm	149.1 mm	155.6 mm

Photometric data

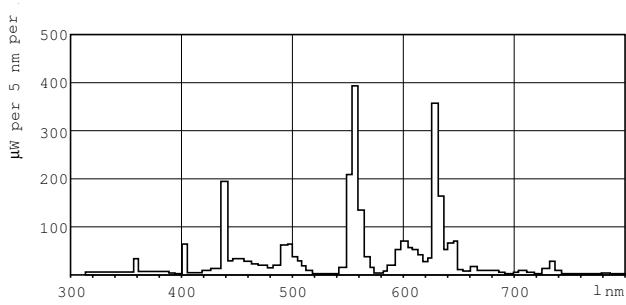

Lightcolour /840

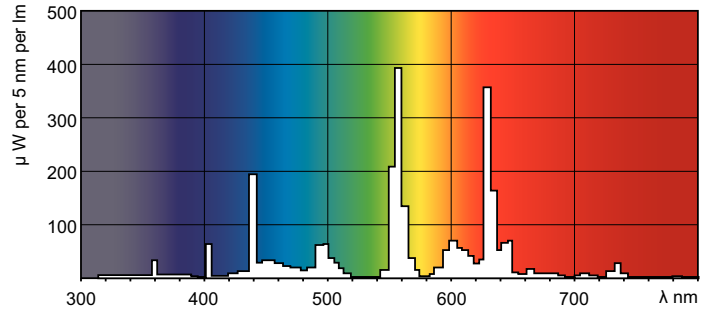

Lightcolour /840

