

BWP ECO LED Weatherproof Batten Gen 2

The high output LED weatherproof batten has longer life and the ability to select your preferred lumen output/wattage within one light fitting.



- Wide Polycarbonate body to cover old footprint
- Robust and lockable stainless steel clips on body
- Easy installation with large terminal block, stainless steel mounting clips, 20mm cable gland and one optional knock-out at the opposite end

LUMEN^{SELECT} | COLOUR^{SELECT}



80

CRI



IP65

Ingress Protection Rating



IK08

Impact Rating



5SDCM

MacAdam Steps



54,000hrs (L70/B50)

Lifetime



3 Years

Warranty



100°

Beam Angle


CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	SENSOR TYPE
BWPECO202ECS	18W	2500lm	138lm/W	4000K	L655 x W130 x H92 mm	1kg	10.2A	
		2100lm	116lm/W	3000K				
		2100lm	116lm/W	6000K				
BWPECO404ECSLS	40W	5200lm	117lm/W	4000K	L1265 x W130 x H92 mm	1.9kg	12.3A	
	33W	4200lm	118lm/W	4000K				
	27W	3400lm	133lm/W	6000K				
	20W	2500lm	125lm/W	3000K				
	27W	3400lm	125lm/W	3000K				
	33W	4000lm	121lm/W	3000K				
	20W	2700lm	135lm/W	4000K				
	27W	3600lm	133lm/W	4000K				
	20W	2500lm	125lm/W	6000K				
	33W	3900lm	118lm/W	6000K				
	40W	4600lm	115lm/W	6000K				
	40W	4700lm	117lm/W	3000K				
	BWPECO404ECSS	40W	4737lm	118lm/W				4000K
BWPECO505ECS	52W	6200lm	119lm/W	4000K	L1565 x W130 x H92 mm	2.5kg	12.7A	
		5900lm	113lm/W	3000K				
		5700lm	109lm/W	6000K				

ACCESSORY CODE


DESCRIPTION

PRC05

REMOTE CONTROL FOR PROGRAMMING PIERLITE SENSORS (TYPE 05)

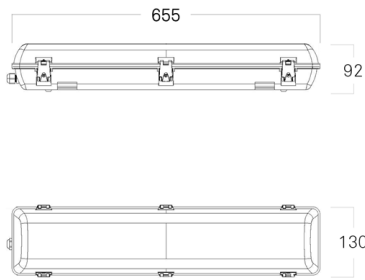

BWPECO202ECS

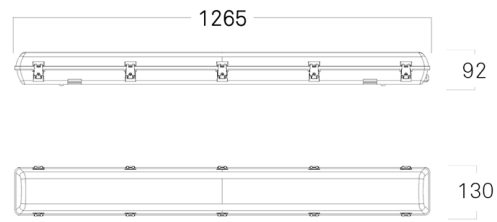

BWPECO404ECSLS, BWPECO404ECSS

Product Images



BWPECO404ECSLS, BWPECO404ECSS



BWPECO505ECS