


ECO LED Batten Gen 3

ECOBAT202ECSG3

- One box solution with 3-in-1 Colour Select
- Increased visual comfort with less than 1% flicker
- Quick release clips for easy installation

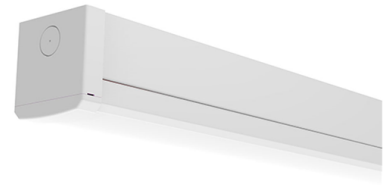

Performance

System Power	18W
Exit Lumen	1700lm, 1900lm, 1700lm
Efficacy	94lm/W
CCT	4000K, 5000K, 6500K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	5SDCM
Ingress Protection Rating	IP20
Impact Rating	IK06
Beam Distribution	Symmetric
Beam Angle	120°
Warranty	4 Years
Lifetime	54,000hrs (L70/B50)

Physical


Dimensions	L603 x W74 x H74mm
Diffuser	Opal
Luminaire Colour	White
Weight	0.80kg
Luminaire Material	Steel (Mild)
Driver Location	Integrated
Finish	Powder Coated
Installation	Ceiling Surface Mounted

Electrical


Dimming	Non - Dimmable
Voltage	240V
Inrush Current	12A
Inrush Current Duration	350µs
Line Current	0.07A
Electrical Rating	Class 1

COLOUR SELECT

Line Drawings

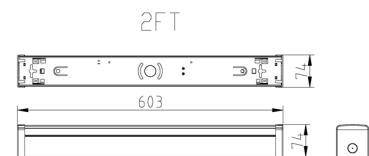

Product Images



Accessories

WG4	W/GUARD 1200MM C/W BRACKETS
WG2	W/GUARD 600MM C/W BRACKETS

Product Images

