


ECO LED Batten Emergency Gen 3

The economical and reliable LED emergency batten. NOW Complete with Lithium Iron Phosphate battery

- Energy efficient LED emergency luminaire AS2293 compliant
- Maintained Emergency operation with Lithium Iron Phosphate (LiFePO₄) battery
- Steel body with opal diffuser and Insect proof sealed LED module

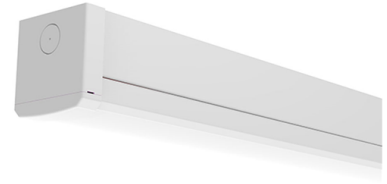

LUMEN^{SELECT} | COLOUR^{SELECT}



80

CRI



IP20

Ingress Protection Rating



5SDCM

MacAdam Steps



0°C to 40°C

Operating Temperature



Non - Dimmable

Dimming



54,000hrs (L70/B50)

Lifetime



4 Years

Warranty



Symmetric

Beam Distribution



120°

Beam Angle

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS
ECOBAT404ECS/ME	36W	3600lm	100lm/W	4000K	L1164 x W74 x H74 mm
	30W	3200lm	106lm/W	4000K	
	25W	2700lm	108lm/W	4000K	
	18W	2180lm	121lm/W	4000K	
	36W	4100lm	113lm/W	5000K	
	30W	3600lm	120lm/W	5000K	
	25W	2960lm	118lm/W	5000K	
	18W	2300lm	127lm/W	5000K	
	36W	3700lm	102lm/W	6500K	
	30W	3300lm	110lm/W	6500K	
	25W	2770lm	110lm/W	6500K	
	18W	2190lm	121lm/W	6500K	


CLASSIFICATION	EMERGENCY MODE WATTAGE	EMERGENCY MODE LUMEN	BATTERY	BATTERY VOLTAGE	BATTERY CAPACITY	TESTING SYSTEM
CO/C180: D32; C90/C270: D25	3W	286.9lm	LiFePO ₄	6.4V	1500mA	Manual

AS/NZS 2293.1:2018 Classification Table

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)		
	CO	C90/C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	15.7	16.5
3.3	17.6	16.1	17.6
3.6	18	16.4	18
4	18.5	16.8	18.5
4.5	19	17.3	19
5	19.5	17.6	19.5
6	20.1	18.1	20.1
7	20.5	18.3	20.5


ECOBAT404ECS/ME

Line Drawings

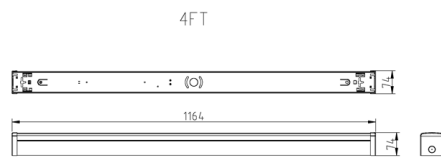

ECOBAT404ECS/ME

Product Images



ECOBAT404ECS/ME



ECOBAT404ECS/ME