


## ECO LED Panel Gen 2

### ECOPL123CSEG2

- One box solution - 3-in-1 Colour Select option to choose the right colour temperature for the application
- Easy to install - Remote constant current driver with 1.2 meter flex and plug and light-weight design
- Quality opal diffuser - delivering high quality and even light distribution

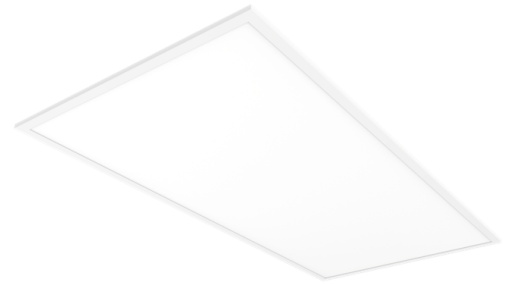

## COLOUR SELECT

### Performance

System Power	27W
Exit Lumen	2800lm, 2800lm, 2900lm
Efficacy	103lm/W
Tuneable CCT	N/AK to N/AK
CCT	4000K, 6500K, 5000K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	6SDCM
Ingress Protection Rating	IP40
Beam Distribution	Symmetric
Beam Angle	110°
Warranty	3 Years
Lifetime	105,000hrs (L80/10)


### Physical

Dimensions	L1195 x W295 x H30mm
Diffuser	Polystyrene
Luminaire Colour	White
Weight	2kg
Luminaire Material	Aluminium (Extruded)
Driver Location	Remote
Finish	Powder Coated
Installation	Recessed

### Electrical

Dimming	Non - Dimmable
Voltage	240V
Line Voltage Frequency	50Hz
Inrush Current	2A
Inrush Current Duration	52µs
Line Current	0.12A
Electrical Rating	Class II

### Line Drawings

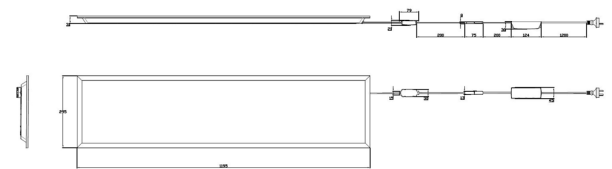

### Product Images



## Accessories

ECOPLWIREKITG2H	BACKLIT PANEL SUSPENSION KIT 1M Y-SHAPE WIRE 2 BRACKETS
ECOPNLBRKTKIT	ECO PANEL BRKT KIT (4) & SCREWS
FRM/PM18W	Plaster frame to mount in plaster ceiling - White, 600x300mm
FRM/PM18WIDE	Plaster frame to mount in plaster ceiling - White, 600x600mm
FRM/PM36W	Plaster frame to mount in plaster ceiling - White, 1200x300mm
FRM/PM36WIDE	Plaster frame to mount in plaster ceiling - White, 1200x600mm
UDFRM/12-3	Universal Deep Frame 1200x300mm
UDFRM/12-6	Universal Deep Frame 1200x600
UDFRM/6-3	Universal Deep Frame 600x300mm
UDFRM/6-6	Universal Deep Frame 600x600
EMKIT-5W-MT	Plug and Play Self-contained emergency conversion kit for Panels and troffers