

Shadow Floodlight Gen3

The Pierlite Shadow Floodlight Gen3 has been designed into a sleek low profile housing providing high functionality with style. It is available in 15W/30W lumen select, 50W, 100W and 200W variants available with colour select. Suitable for residential, commercial and light industrial applications.

- Available in 15/30W, 50W, 100W and 200W with 3000K/4000K/5000K colour temperature options.
- Slimline chromated LM6 marine grade aluminum housing finished in a RAL7021 black powder-coated finish
- Improved lumen output, with an opaque low glare glass providing increased efficacy of up to 144lm/W



COLOUR SELECT



80

CRI



IP65

Ingress Protection Rating



IK08

Impact Rating



6SDCM

MacAdam Steps



-25 to 40

Operating Temperature



54,000hrs (L70/B50)

Lifetime



5 Years

Warranty



Symmetric

Beam Distribution



No


Turtle Friendly




110°

Beam Angle


CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	INRUSH CURRENT DURATION
SHAD100CSG3	100W	14000lm	130lm/W	4000K	L290 x W308 x H58 mm	2kg	36A	400µs
		12600lm	126lm/W	3000K				
		13400lm	133lm/W	5000K				
SHAD200CSG3	200W	28000lm	141lm/W	4000K	L345 x W374 x H58 mm	3kg	59A	530µs
		24700lm	124lm/W	3000K				
		26200lm	132lm/W	5000K				
SHAD30CSLSG3	30W	4050lm	138lm/W	4000K	L168 x W178 x H37 mm	0.80kg	26A	400µs
	15W	1990lm	134lm/W	3000K				
	15W	2080lm	144lm/W	4000K				
	15W	2100lm	142lm/W	5000K				
	30W	3700lm	121lm/W	3000K				
	30W	3930lm	128lm/W	5000K				
SHAD50CSG3	50W	6600lm	136lm/W	4000K	L205 x W223 x H36 mm	1kg	42A	290µs
		5780lm	136lm/W	3000K				
		6390lm	120lm/W	5000K				

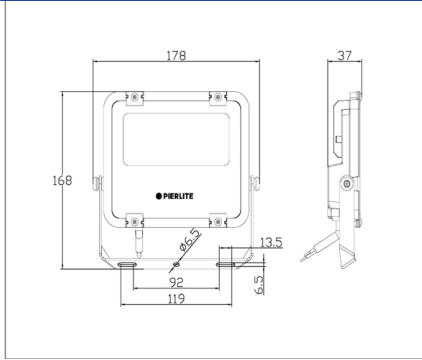


SHAD30CSLSG3

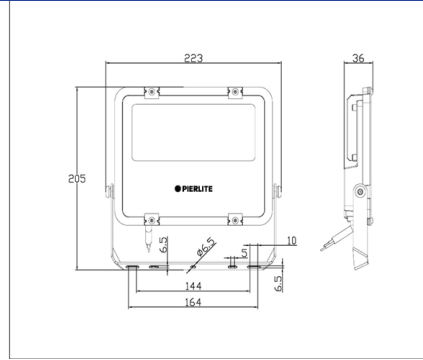

SHAD50CSG3

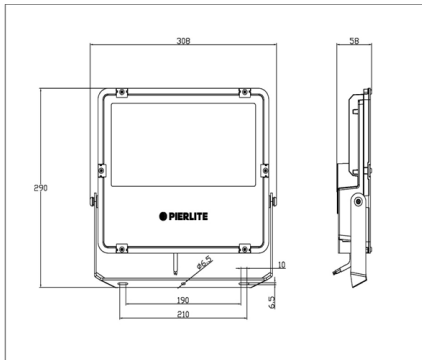

SHAD100CSG3

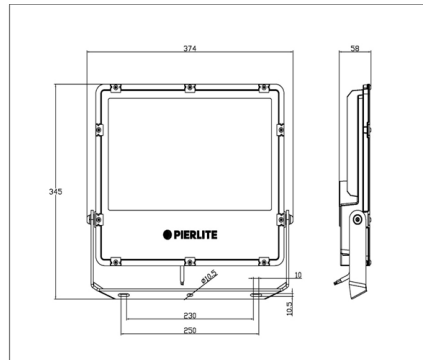

SHAD200CSG3



SHAD30CSLSG3



SHAD30CSLSG3



SHAD50CSG3



SHAD50CSG3



SHAD100CSG3



SHAD100CSG3



SHAD200CSG3



SHAD200CSG3