



SKYLUX G4 NEW

Highbays

TRITONE
Colour
Changeable

4POWER
Switchable
Modes

DIM
0-10V
Dimming

IP65
Ingress
Protection
Rating

IK08
Impact
Rating

5yr
Warranty

State of the art highbay solution.

SKYLUX G4 is the latest evolution in highbay lighting from Haneco. This iteration features a tough aluminium housing with optimised heat dissipation to ensure prolonged LED life as well as precision optics for improved performance. A wide range of accessories can be fitted, including programmable plug and play smart sensor, making SKYLUX G4 the right choice for industrial and warehouse applications.

Features

- Tritone and power switchable
- Optional plug in microwave motion sensor
- High lumen efficacy up to 175lm/W
- Flicker-free driver
- Emergency kit available
- Optional DALI convertor available
- Tough diecast aluminium housing
- Various accessories available

Benefits

- Reduced SKUs and inventory levels
- Retrofittable smarts for additional power conservation
- Enhanced energy savings
- Increased health and productivity
- Provides safety in case of power outages
- Easy system integration
- Improved heat dissipation
- Extended application options

Product Overview

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
100W	17658 lm	166 lm/W	3000K	Ø340 x 183mm	3.00kg	2002270	SKYLUX200W-G4
	17915 lm	175 lm/W	4000K				
	17798 lm	171 lm/W	5000K				
150W	24502 lm	160 lm/W	3000K				
	25322 lm	172 lm/W	4000K				
	25002 lm	165 lm/W	5000K				
170W	26860 lm	157 lm/W	3000K				
	27751 lm	168 lm/W	4000K				
	27651 lm	163 lm/W	5000K				
200W	30515 lm	152 lm/W	3000K				
	31298 lm	164 lm/W	4000K				
	31770 lm	162 lm/W	5000K				

SPECIFICATIONS

Body Material:	Aluminium
Diffuser Material:	Polycarbonate (Clear)
Body colour:	Black
IP Rating:	IP65
IK Rating:	IK08
Beam Angle:	120°
CRI:	>80
SDCM:	<5
Driver:	Integral
Power Lead:	1.5m Rubber Flex & Plug
Input:	100-277V, 50/60Hz
Electrical Classification:	Class 1

Power Factor:	>0.9
Protection:	Overload / Short Circuit
Lifespan:	>50,000hrs @Ta25°C (L70)
Operating Ambient Temperature:	-30 to 50°C
Smart:	KASTA Compatible
Dimming:	0-10V Dimmable

APPLICATIONS

Warehouses
Factories
Sheds
Industrial
Large Commercial Spaces

ACCESSORIES

Microwave Motion Sensor HIGHBAY-MS
(SAP 2002281)

- Quick connect
- 12m range with corridor function



Sensor Remote Controller HIGHBAY-REMOTE
(SAP 2002282)

- Required to reprogram sensor



Surface Mount Bracket SKYLUXG4-BRKT
(SAP 2002276)




Prismatic Reflector 200W: SKYLUX200G4-PR
(SAP 2002278)




DALI Converter HBAY-DALI-CONV
(SAP 2002095)

- IP65 rated
- Converts product to be DALI dimmable



Emergency Kit SKYLUX-EMKIT
(SAP 2002275)

DIMENSIONS

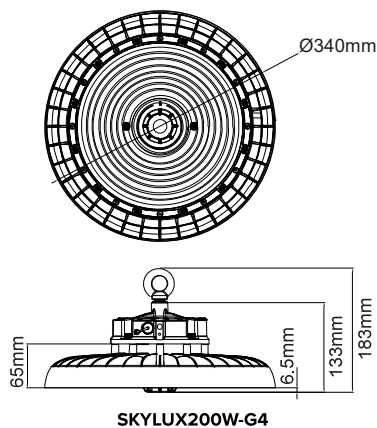

Highbays and Lowbays

FIND OUT MORE:

