



## G4 SERIES G4L15 - 1.5W

1.5 watt LED G4 base lamp

### Application


Energy efficient LED lamp solutions designed for G4 base luminaires

### Design Specifications

- Transparent silicone body
- 12V AC or DC driver required
- High efficiency LED optics
- CCT choice of 3000K / 6000K, CRI > 80
- Beam distribution 270°
- Compatible with most electronic transformers, suits most G4 lamp fittings

### Performance

- Dimmable - **NO**

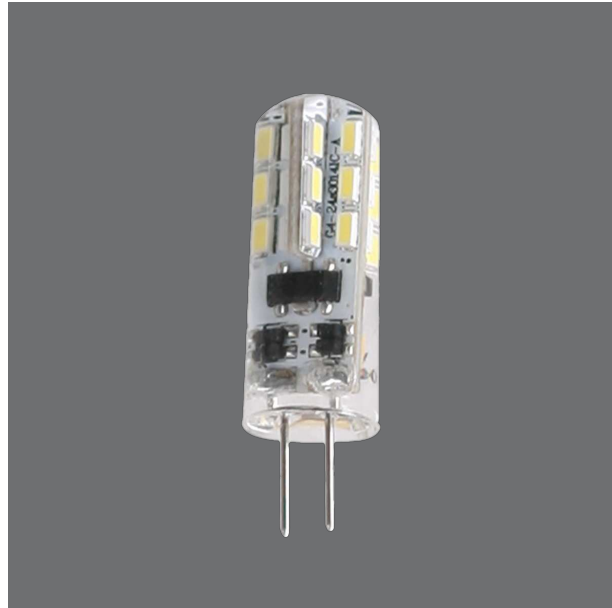

NEED A HAND  
PACKING YOUR  
PRODUCT DATA  
SHEETS?  
  
GIVE THE SAL  
SHOPPING CART  
A GO.



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Input Voltage (V/DC)	Power (W)	Lumens (lm)	CCT (K)
	<b>G4L15WW</b>	12	12	1.5	90	3000
	<b>G4L15DL</b>	12	12	1.5	100	6000

CRI	Beam Angle (°)	Dimmable	Diameter (mm)	Height (mm)	Base Type
80	120	NO	9.5	34	G4
80	120	NO	9.5	34	G4

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



## Dimensions

G4L15



# COLOUR TEMPERATURE, THERE IS A DIFFERENCE



TC SELECTABLE COLOUR		
WARM WHITE <b>2700K</b>	COOL WHITE <b>4000K</b>	DAYLIGHT <b>6000K</b>

Lighting is more than just brightness or lumens. Make sure you take the time to select the right colour temperature to create the best visual appearance; your eyes don't tell lies!