



OPAL DIM LG5 - 4W

4 watt dimmable LED filament GLS style lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser, ES or BC base
- High efficiency LED filament and colour rendering CRI > 80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K / 5000K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings, double insulation

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**



Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
LG5/27B22D	240	4	450	2700	80	320
LG5/27E27D	240	4	450	2700	80	320
LG5/50B22D	240	4	500	5000	80	320
LG5/50E27D	240	4	500	5000	80	320


Model No.	Dimmable	Diameter (mm)	Length (mm)	Base Type
LG5/27B22D	YES	60	105	B22
LG5/27E27D	YES	60	106	E27
LG5/50B22D	YES	60	105	B22
LG5/50E27D	YES	60	106	E27

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions

LG5 B22

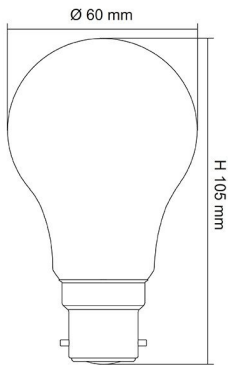

LG5 E27

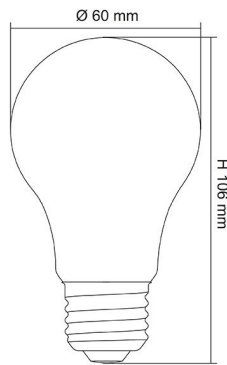

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
UNIFIT SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

