



## OPAL LGS10 - 10W

10 watt LED SMD GLS style opal lamps

### Application

Energy efficient LED lamp solutions

### Design Specifications

- Opal polycarbonate diffuser, beam distribution 240 degree
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency SMD LED chips, CRI > 80
- Integral non-dimmable LED driver
- Colour temperature 3000K / 4000K / 6000K
- 1:1 size to traditional GLS / A55 lamp, suits most GLS / A55 lamp fittings, double insulation



- 
- 
- 
- 
- 
- 
- 
- WARM WHITE 3000K**
- COOL WHITE 4000K**
- DAYLIGHT 6000K**

### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
LGS10/830B22	LED GLS LAMP 10W B22 3K	240	10	950	3000	80
LGS10/840B22	LED GLS LAMP 10W B22 4K	240	10	1000	4000	80
LGS10/860B22	LED GLS LAMP 10W B22 6K	240	10	1050	6000	80
LGS10/830E27	LED GLS LAMP 10W E27 3K	240	10	950	3000	80
LGS10/840E27	LED GLS LAMP 10W E27 4K	240	10	1000	4000	80
LGS10/860E27	LED GLS LAMP 10W E27 6K	240	10	1050	6000	80




Model No.	Beam Angle (°)	Dimmable	Dimensions (mm)	Base Type
LGS10/830B22	240	NO	110(L) x 60(W)	B22
LGS10/840B22	240	NO	110(L) x 60(W)	B22
LGS10/860B22	240	NO	110(L) x 60(W)	B22
LGS10/830E27	240	NO	110(L) x 60(W)	E27
LGS10/840E27	240	NO	110(L) x 60(W)	E27
LGS10/860E27	240	NO	110(L) x 60(W)	E27


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

LGS10 E27

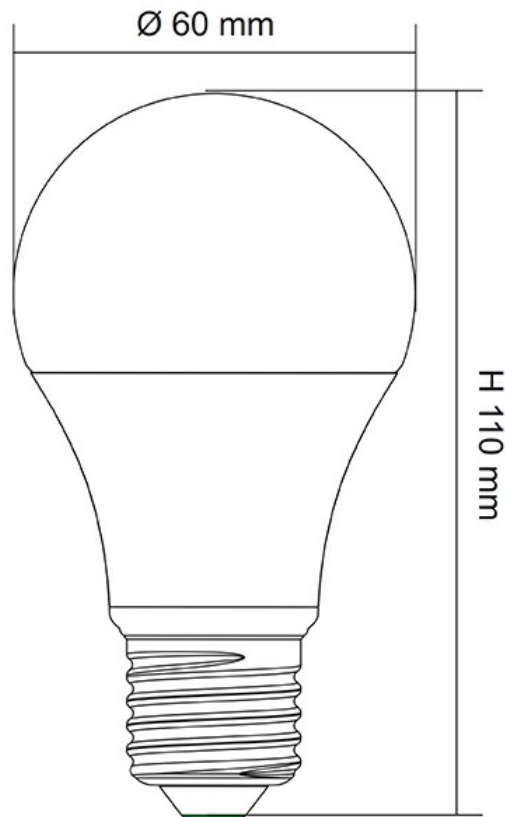

LGS10 B22

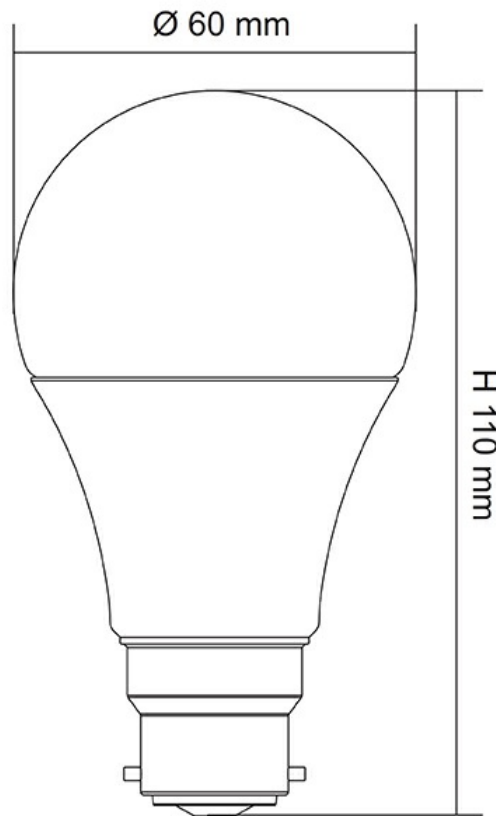

## Product Images

