



## LT SERIES LT409 - 9W

9 watt non-dimmable LED SMD tubular lamps

### Application

Energy efficient LED lamp solutions

### Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, beam 240 degree
- Integral non-dimmable LED driver
- Colour temperature 3000K / 4000K / 6000K, CRI >80
- Suits most CFL lamp fitting, lamp bases B22, E27, double insulation



### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
LT409/27B22	LED TUBULAR 40mm 9W B22 3K	240	9	850	3000	80
LT409/40B22	LED TUBULAR 40mm 9W B22 4K	240	9	900	4000	80
LT409/65B22	LED TUBULAR 40mm 9w B22 6K	240	9	950	6500	80
LT409/27E27	LED TUBULAR 40mm 9W E27 3K	240	9	850	3000	80
LT409/40E27	LED TUBULAR 40mm 9W E27 4K	240	9	900	4000	80
LT409/65E27	LED TUBULAR 40mm 9W E27 6K	240	9	950	6500	80




Model No.	Beam Angle (°)	Dimmable	Dimensions (mm)	Base Type
LT409/27B22	240	NO	106(L) x 40(W)	B22
LT409/40B22	240	NO	106(L) x 40(W)	B22
LT409/65B22	240	NO	106(L) x 40(W)	B22
LT409/27E27	240	NO	107(L) x 40(W)	E27
LT409/40E27	240	NO	107(L) x 40(W)	E27
LT409/65E27	240	NO	107(L) x 40(W)	E27


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

LT409 B22

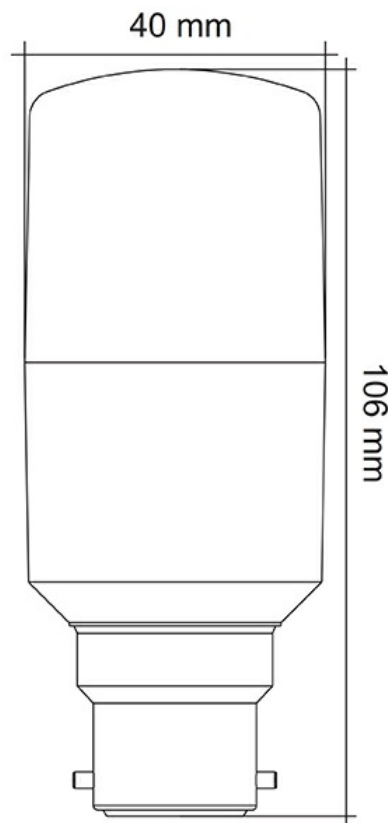

LT409 E27

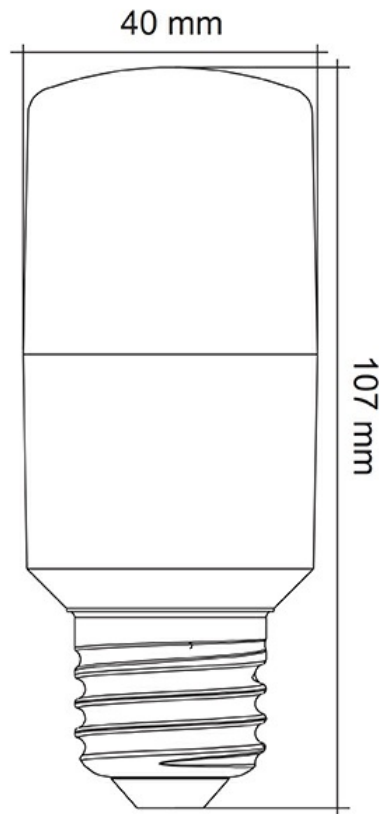

## Product Images

