



SURFACE MT FRAME - S-FM

LED panel installation type S-FM surface mounted frame

Application

Designed for commercial interior office spaces

Design Specifications

- Pressed steel base
- Quality powder coated finish
- Accommodates ESS101 quick connect surface mount socket, excluding BACKLIT panels
- For S312FM and S606FM add the suffix **/P** or **/P2** to the order code, for kit form assemblies supplied ready for easy assembly on site.



Performance


- Dimmable - **NO**

Technical Specification

Model No.	Dimmer Type	Body Colour	Dim (mm)
S306FM	NO	WHITE	600(L) x 358(W) x 65(H)
S312FM	NO	WHITE	1200(L) x 358(W) x 65(H)
S606FM	NO	WHITE	600(L) x 658(W) x 65(H)
S612FM	NO	WHITE	1200(L) x 658(W) x 65(H)
S606FM/P	NO	WHITE	600(L) x 658(W) x 65(H)
S312FM/P2	NO	WHITE	1200(L) x 358(W) x 65(H)
S606FM/P2	NO	WHITE	600(L) x 658(W) x 65(H)
S612FM/P2	NO	WHITE	1200(L) x 658(W) x 65(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

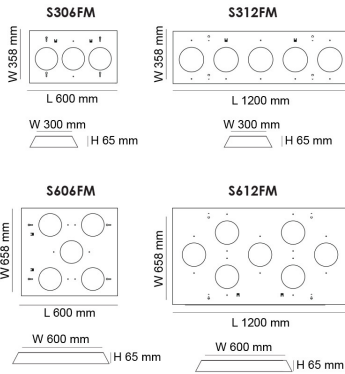



LED downlights, oysters, linear battens and profiles, track lights, strip lights, interior architectural, highbays, lamps, emergency, floodlights, exterior architectural, weatherproof, bulkheads, sensors, electrical accessories, smart lighting controls, drivers

For more
information
please
scan me

