



WAVE SE S9065TC/MS - 9W


IP44 LED downlight with selectable CCT and movement sensor

Application

Ideal for any residential or strata common area interior spaces

Design Specifications


- Selectable CCT 3000K/4000K/5700K and integral microwave sensor
- Microwave sensor adjustments - 5sec/90sec/5min/30min, daylight threshold 30 lux / disable, detection distances 8M diameter @ 2.4hm, 6M diameter @ 4.0hm
- Opal polycarbonate diffuser
- Integral constant current non-dimmable LED driver, with flex and plug
- Poly covered aluminium body, double insulation, IC - 4 rated
- Deco ring options - Satin Nickel (S9065SN/RING), Black (S9065BK/RING)



Performance

- Dimmable - **NO**
- In Built Sensor - **YES**
- Sensor Type - **MICROWAVE**

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9065TC/MS	240	9	750/900/800	3000/4000/5700	90


Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	IPART
NO	80	WHITE	92	113	59(H)	N/A

REES	VEET
N/A	N/A

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

S9065

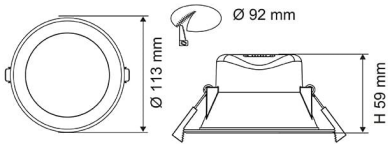

SENSOR ADJUSTMENT UNDER TERMINAL COVER


S1	S2	Time	S3	Lux
0	0	5s	0	Disable
1	0	90s	1	30Lux
0	1	5min	1	(ON)
1	1	30min	0	(OFF)

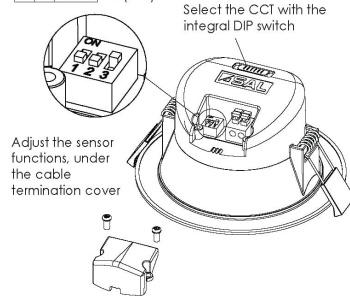

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9065TC at 3000K



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

