



WAVE S9066TC - 12W

Dimmable IP44 LED downlight with selectable CCT

Application


Ideal for any residential interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC 4 rated
- Opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver with flex and plug
- High efficiency SMD LED chips
- Optional deco ring, satin nickel S9066SN/RING, black S9066BK/RING

Performance

- Dimmable YES
- Dimmer Type **Trailing edge**

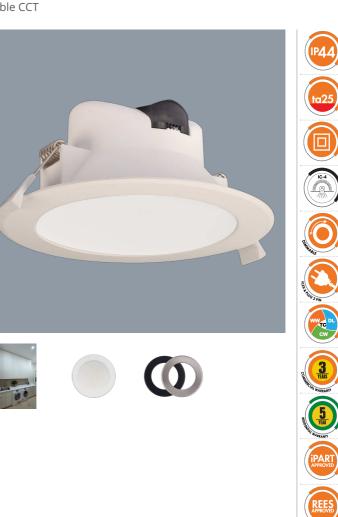

Technical Specification

Product	Model No.		Input Voltage (V/AC)		Power (W)		Lumens (lm)	СС	СТ (К)	Beam Angle (°)		
	S9066TC WH		240		12	13	00/1450/1350	3000/4	0000/4000/5700		90	
Dimmable	CRI	Body Colour		Cut Out (mm)		Dia	Diameter (mm)		Dim (mm)		PART	
YES	80	٧	VHITE	125			145		66(H)		YES	
REES YES						VEET YES						


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".





Dimensions


S9066TC



Photometric Data

Unit: cd C0/C180_____ C90/C270_____

S9066TC at 3000K





THE SFI SYSTEM ELIMINATES LED FLICKERING.

SIMPLY MATCH THE ECOGEM SFI DOWNLIGHT WITH THIS SDD400SFI DIMMER.





For related products please scan me





NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458