



DISC SL2105TC - 12/30W

Dimmable IP54 LED Oyster, 12, 25, 30 watt, with selectable CCT

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Robust white polycarbonate body profile, three sizes to select
- Quality opal polycarbonate diffuser
- High efficiency LED optics, CRI > 80, selectable CCT 3000K, 4000K or 5700K
- Integral constant current trailing edge dimmable LED driver
- Low profile design, IP54, designed for weather protected (under eaves) installations, double insulated
- Dimensions (mm):
 (20TC) = (D1) 200 x (H1) 48 (D2) 173 x (H2) 16
 (30TC) = (D1) 300 x (H1) 40 (D2) 271 x (H2) 13
 (40TC) = (D1) 400 x (H1) 52 (D2) 363 x (H2) 15



-
-
-
-
-
-
-
-
-
-
-

Performance

- Dimmable - **YES**
- Dimmer Type - **Compatible trailing edge dimmers, SDA450U, SDD400U**

Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL2105/20TC	240	12	1100/1200/1200	3000/4000/5700	80
	SL2105/30TC	240	25	2450/2600/2500	3000/4000/5700	80
	SL2105/40TC	240	30	2800/3480/3000	3000/4000/5700	80



Beam Angle (°)	Body Colour	Diameter (mm)	Dim (mm)
120	WHITE	200	48(H)
120	WHITE	300	40(H)
120	WHITE	400	52(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

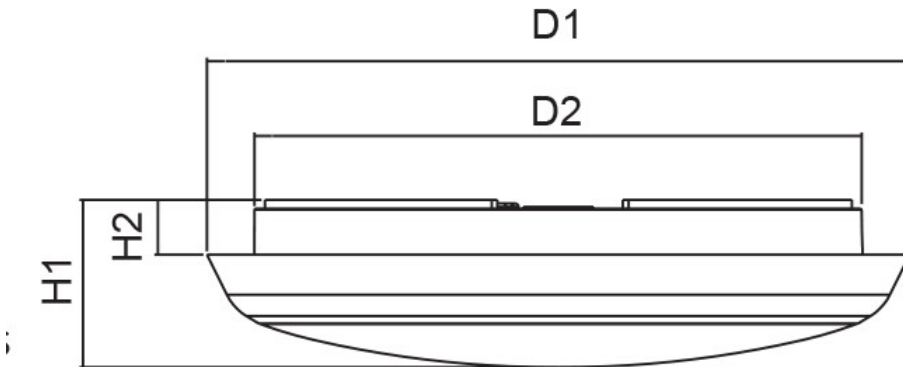


Photometric Data

Unit: cd C0/C180 — C90/C270

SL2105/20TC at 3000K



SL2105/40TC at 5700K



PIXIE AMBIENCE, CHANGE YOUR STYLE.



PIXIE AMBIENCE GPO SMART SOCKET
SPO23/BTAM



For more
information
please
scan me

