




UNISTRUT® P4000



A - 160mm²
 kg/m - 1.26kg/m
 I x-x = 0.010 10⁶mm⁴
 Z x-x = 0.786 10³mm³
 r x-x = 7.8mm
 I y-y = 0.039 10⁶mm⁴
 Z y-y = 1.880 10³mm³
 r y-y = 15.6mm



Mass: 1.26kg/m

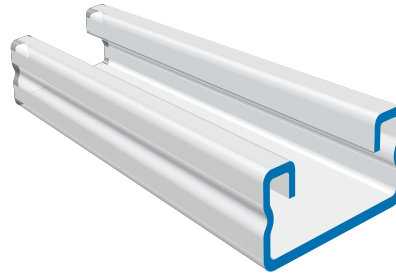

PL/GB/HG/TG/SS


P4000

Part No.	Material Thickness	Length
P4000-PL	1.6mm	6m
P40003-PL	1.6mm	3m
P4000-GB	1.6mm	6m
P40003-GB	1.6mm	3m
P4000-HG	1.6mm	6m
P40003-HG	1.6mm	3m


Standard Length: 6m

(2) See Note 2 Page 9

L(mm)	Fmax(kN)	fmax(mm)	F(kN)
250	4.20	0.44	22.36
500	2.10	1.77	16.30
750	1.40	3.98	10.46
1000	1.05	7.08	6.54
1250	0.84	11.07	4.54
1500	0.70 (2)	15.94	3.35
1750	0.60 (2)	21.69	-
2000	0.52 (2)	28.33	-
2250	0.47 (2)	35.86	-
2500	0.42 (2)	44.27	-
2750	0.38 (2)	53.57	-
3000	0.35 (2)	63.57	-




A - 138mm²
 kg/m - 1.08kg/m
 I x-x = 0.008 10⁶mm⁴
 Z x-x = 0.729 10³mm³
 r x-x = 7.6mm
 I y-y = 0.038 10⁶mm⁴
 Z y-y = 1.862 10³mm³
 r y-y = 16.7mm



Mass: 1.08kg/m

Slots 11 wide x 28 long
 at 50mm centres (approx.)

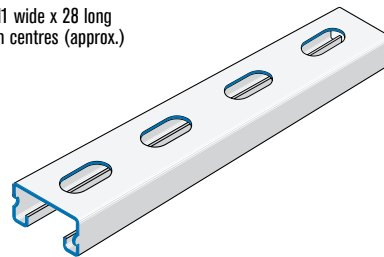

PL/GB/HG/TG/SS

P4000T

Part No.	Material Thickness	Length
P4000T-PL	1.6mm	6m
P40003T-PL	1.6mm	3m
P4000T-GB	1.6mm	6m
P40003T-GB	1.6mm	3m
P4000T-HG	1.6mm	6m
P40003T-HG	1.6mm	3m

Standard Length: 6m

(2) See Note 2 Page 9

L(mm)	Fmax(kN)	fmax(mm)	F(kN)
250	3.78	0.40	20.12
500	1.89	1.59	14.67
750	1.26	3.58	9.41
1000	0.95	6.37	5.89
1250	0.76	9.96	4.09
1500	0.63 (2)	14.35	3.02
1750	0.54 (2)	19.52	-
2000	0.47 (2)	25.50	-
2250	0.42 (2)	32.27	-
2500	0.38 (2)	39.84	-
2750	0.34 (2)	48.21	-
3000	0.32 (2)	57.21	-