





# SKYLITE

SKYLITE200W90D-10VDIM  
SAP CODE: 2001460

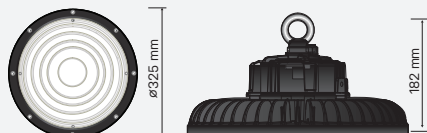

Photometric Diagram



Unit: cd  
 - C0/180 90.0deg  
 - C90/270 90.0deg

Highbays

200W, 1-10V dimming,  
90 degree beam angle  
LED highbay

A cost effective LED highbay for lighting large spaces.

### Accessories

SURFACE MOUNT BRACKET

CODE: SKYLITE-BRKT-L

## KEY INFORMATION

Lumen Output	28870lm
Input Power	200W
Hole Cutout Size	N/A
Dimming Options	1-10V Dimming
Trim Colour	BLACK
Warranty	4yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART

## PHOTOMETRIC

LED	SMD
Efficacy	144lm/W
CCT	5000K
CRI	>75
Beam Angle	90°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	106VDC
Power Factor	>0.9
LED Input Current (nominal)	1780mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Graphene
Lens	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	1.8m Flex & Plug
Total Weight	4.53kg
Dimensions	Ø325 x 182mm
Operating Ambient Temp.	-30 to 45°C
Electrical Classification	Class 1