



LT SERIES LT409TCD - 9W

9 watt DIMMABLE LED SMD tubular lamps, with selectable colour temperature

Application

Energy efficient LED lamp solutions


Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, beam 200 degree
- Integral dimmable LED driver
- Selectable colour temperature 3000K / 4000K / 6000K, CRI > 80
- Suits most CFL lamp fitting, lamp bases B22, E27, double insulation

Performance

Dimmable - **YES**

Dimmer Type - **Trailing Edge**

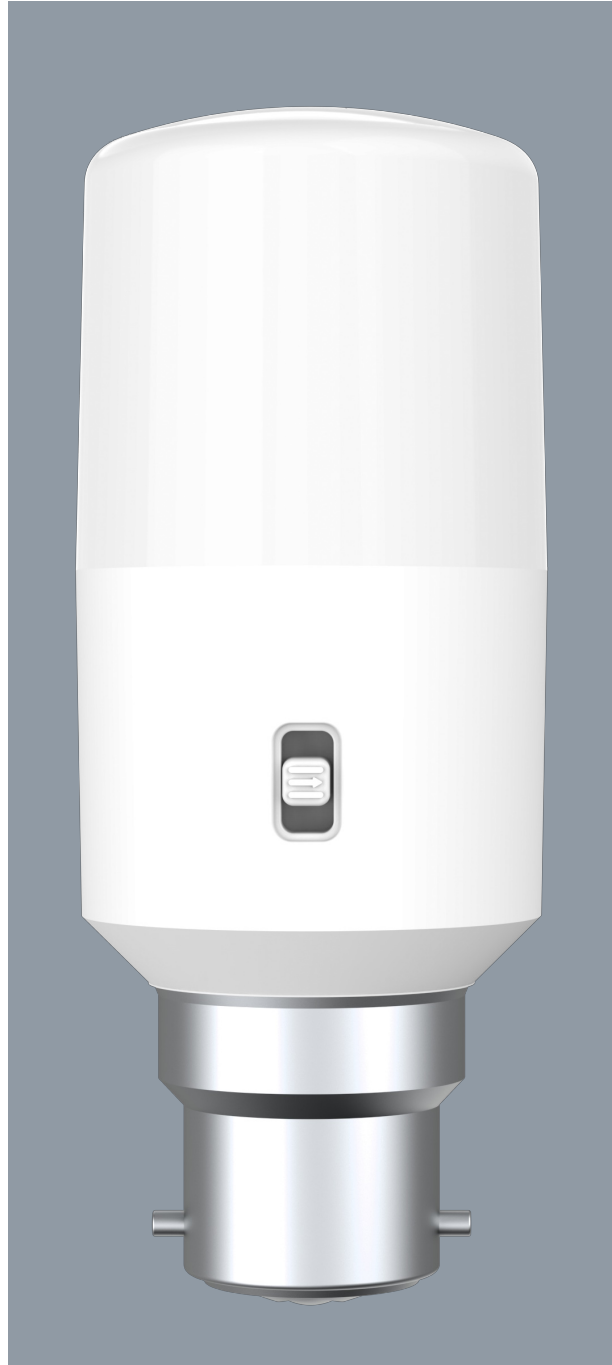

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
LT409TC/B22D	240	9	850/900/850	3000/4000/6000	80	200
LT409TC/E27D	240	9	850/900/850	3000/4000/6000	80	200

Model No.	Dimmable	Diameter (mm)	Length (mm)	Base Type
LT409TC/B22D	YES	40	101	B22
LT409TC/E27D	YES	40	102	E27

IMPORTANT, where CCT selection switching is provided, it is important to switch OFF the SUPPLY before the CCT selection is made, otherwise equipment damage may occur.


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions



LT407 B15 LT407 B22 LT407 E14 LT407 E27

Dimensions

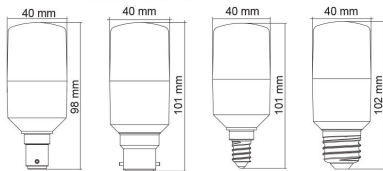

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
UNIFIT SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

